
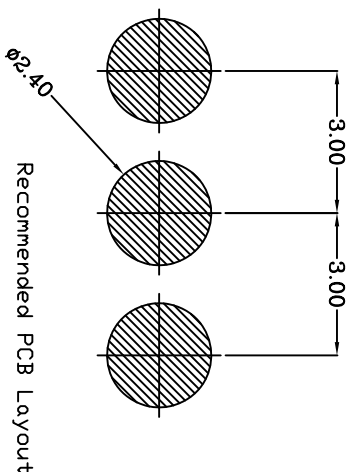
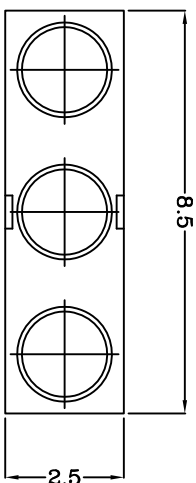


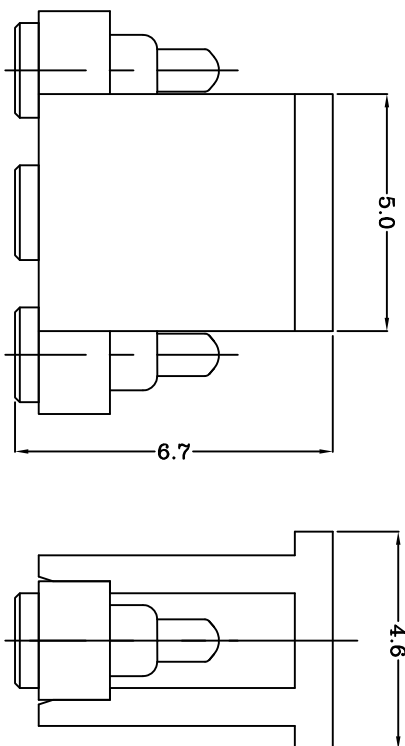

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black.
Contact: Brass
Spring: SUS304
 - 2 Mechanical demands:
Plating Plunger: Min 0.4µm Au over 1.4µm Ni
Plating Body: Min 0.1µm Au over 1.4µm Ni
 - 3 Mechanical
1) Total stroke : 1.0mm
2) Durability: 10,000 cycle min.
 - 4 Electrical
1) Contact resistance: 30mOhm Max.
2) Operating voltage: 36VDC
5 Spring force: 120±25gf at 0.8mm stroke

```
working height3.50
```

TOP-LINK

	NEW		2008/08/14
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL		HT TR	—	FIN	— 
0	= ±-	DWN		APVD	Lansing	Top-Link Electronics Top-Link Electronics Ltd.	
0.0	= ±0.15	Benny			REL		
0.00	= ±0.10	CHK					
0.000	= ±	Andy					
ANGLE: ±1°							
SURF. TEXTURE: 		NAME PGGD 3P					
REMOVE BURRS, BREAK		PGC-1.5-4.3-R-3P-3.0PH					
SHARP EDGES R0.05 MAX		SCALE	A4	DWG NO.	C-100110	SHEET	REV
DO NOT SCALE PRINT		1:1				1 OF 1	A

100110-3
PART NUMBER