
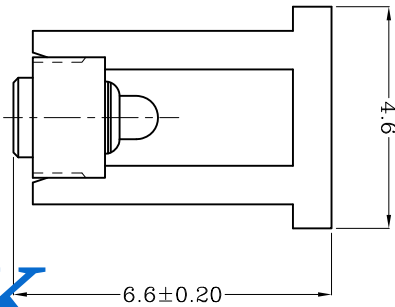
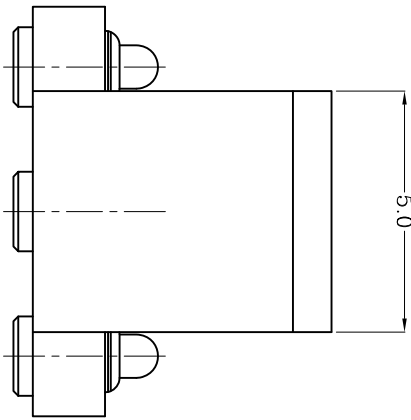
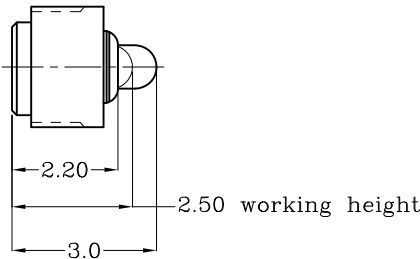


Recommended PCB Layout

Table 1 Mechanical performance		
working height	2.50mm	90gf min<2.1>
Durability	20000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Electrical performance
- 4 Resistance:30mOhm Max.Current rating: 2.0A
- 5 Packaging Spec.Conformance to EIA 481
- 6 RoHS compliant.

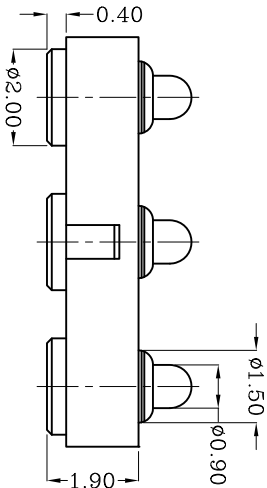

TOP-LINK

DIST

Rev.	NEW	Date.
Revision record.	2011/12/15	

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin Zuozhong	APVD:			100255-3
0.0 = ±0.15		CHK:	REL:				
0.00 = ±0.10							
0.000 = ±0.005							
Angle: ±1°							
SURF. TEXTURE:							
REMOVE BURRS.							
BREAK SHARP EDGES							
R0.05 MAX. DO NOT SCALE PRINT.							
		Name	Customer drawing		PGC-1.5-3.0-R-3P-3.0PH		
		Scale	1:1	Size	A4	DWG No.	C-100255
		Page	1/1	Rev.	1		

Top-Link Electronics Ltd.