



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.






DWG NO.
C-100324

LOC
-
DIST
-

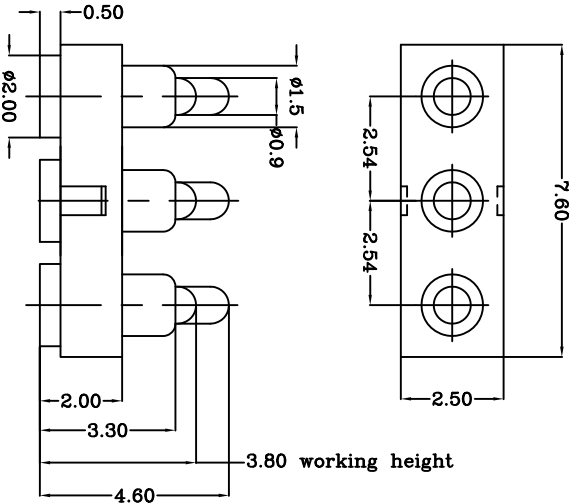

Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.
Contact: Brass
2 Mechanical demands:
Spring force: Min 0.2N with 0.5mm stroke
0.8 +0.60N/-0.20N with 0.8mm stroke.
Full stroke: 1.3mm
Plating Plunger: Min 0.4um Au over 1.4um Ni
Plating Body: Min 0.1um Au over 1.4um .

TOP-LINK

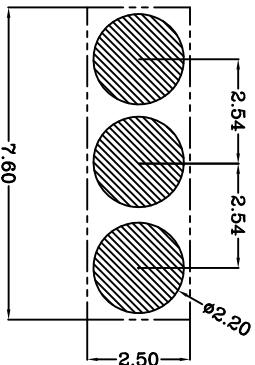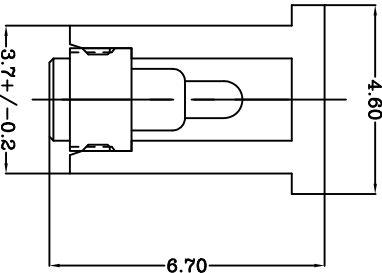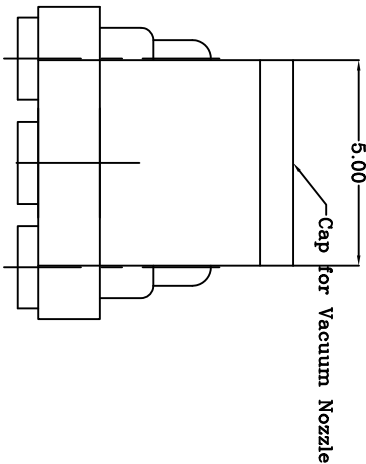

Recommended PCB Layout

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.10		
0.00	= ±		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN		APVD	
CHK		REL	
Jim			
NAME			
SCALE	1:1	A4	
DWG NO.	C-100324		
BATTERY POGO CONNECTOR			
3 POSITIONS			
Pgc-1.5-4.6-R-3P-2.54PH			
SHEET	1 OF 1	REV	A

USED ON

-

100324-3

PART NUMBER

Top-Link
Electronics Ltd.