



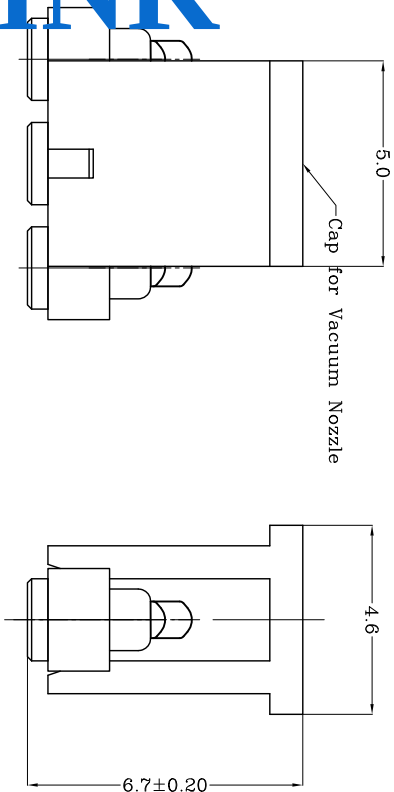

TOP-LINK

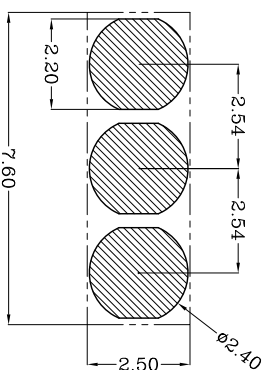

Recommended PCB Layout

Notes:
1 Material, Housing: PA 4,6 (30% Glass Filled)

Contact: Brass

2 Mechanical demands:

Plating Plunger: 0.4 μ m Au over 1.4 μ m Ni

Plating Bo

3 Mechanical:
1) Force: $110 \pm 30 \text{ gf}$ per pin at 0.7mm stroke

2) Total stroke: 0.90mm

3) Durability: 10,000 cycle min.

LDC			ANGLE: 1°		NAME	
-	NEW	2006/11/12	SURF TEXTURE: 32/		BATTERY POGO CONNECTOR 3 POSITIONS	
DIST	LTR	REVISION	REMOVE BURRS, BREAK		PGC-1.5-4.0-R-3P-2.54PH	
-	RECORD	APVD	SHARP EDGES R0.05 MAX		SCALE	
		DATE	DO NOT SCALE PRINT		A4	DWG NO. C-100424
					1:1	SHEET 1 OF 1
						REV A

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	MATL		HT TR	—	FIN	—
0 = +	DWN		APVD		<i>Top-Link Electronics L.td.</i>	
0.0 = ±0.15	Qin					
0.00 = ±0.10	CHK		REL			
0.000 = ±.*						

100424-3
PART NUMBER