


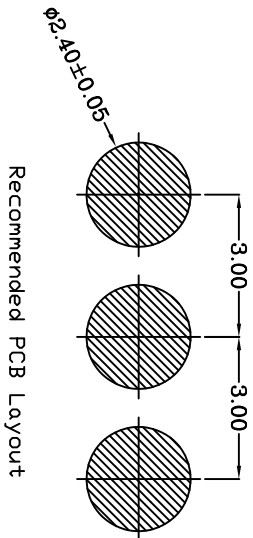


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

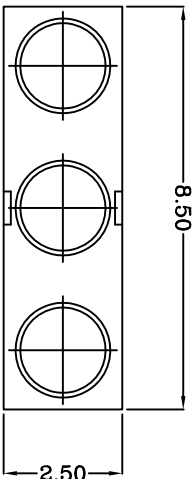

DWG NO.
C-100601

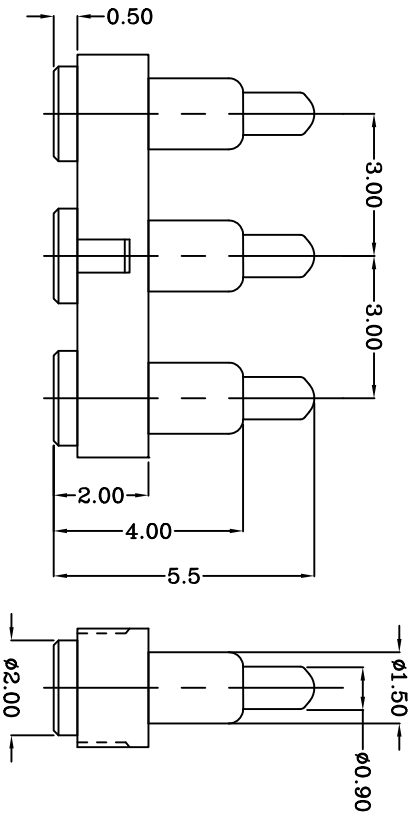

TOP-LINK

Notes:

1 Material, Housing: PA 4.6 (30% Glass Filled)

Color Black.

Contact: Brass

2 Mechanical demands:

1)Plating Plunger: 0.4um Au over 1.4um Ni
2)Plating Body: 0.1um Au over 1.4um Ni.

3 Mechanic:

1)Force: 30±15gf per pin at 1.0mm stroke
2)Total stroke : 1.40mm
3)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.
2)Voltage rating: 36V DC Max
3)Current rating: 2.0A

USED DN

100601-3
PART NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.10		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			

Renovate		2010/06/27
NEW		2010/06/13
REVISION		
RECORD		
APVD		
DATE		

MATL	1	HT TR	—	FIN	—	✓
DWN	Qin	APVD				
CHK		REL				
NAME	PGGD 3P PGC-1.5-5.5-R-3P-3.0PH					
SCALE	1:1	A4	DWG NO.	C-100601	SHEET 1 OF 1	REV 2

Top-Link
Electronics L td.