
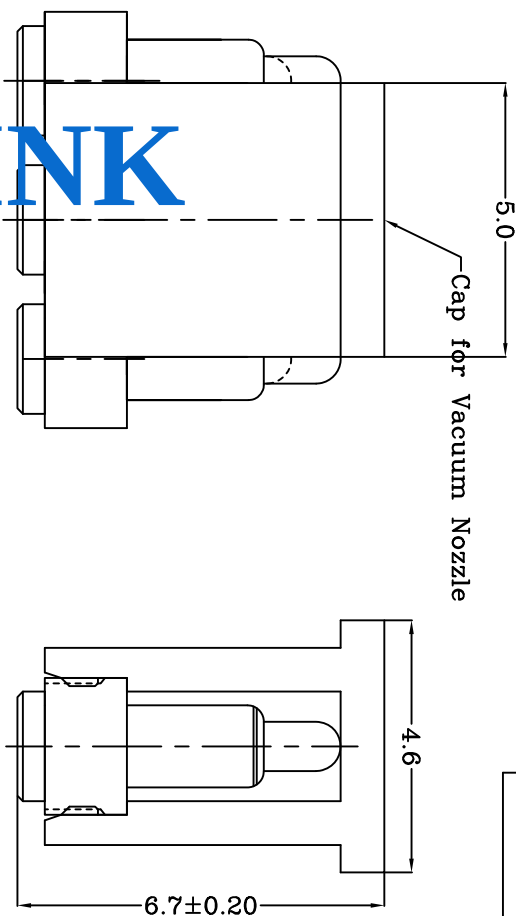


DWG NO.
C-100635

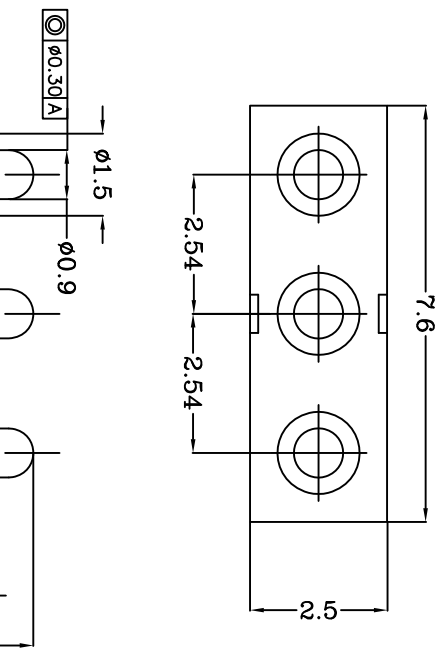

Notes:

1 Material (材質)

Housing: High temp. Plastic, UL94 V-0 Color Black.

Brass

Spring: Stainless steel wire

2 Plugging:

1. Bodwell Min. 0.1um Gold plating over min. 1.4um Nickel plating

(body:鍍金0.1um Min 鍍底1.4um Min)

Part: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger 鍍金0.4um Min 鍍底1.4um Min)

3 Mechanical:

Total stroke (总行程): 1.40mm


Durability (寿命): 10,000 cycle min.

4 Electrical(电性能)

Contact resistance(接触阻抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

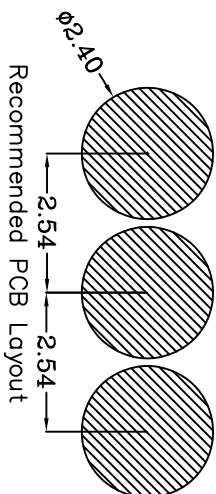

LDC		NAME		BATTERY POGO CONNECTOR 3 POSITIONS	
-		PGC-15-6.0-R-3P-254PH			
DIST		SCALE	A4	DWG NO.	C-100635
-		1:1		SHEET 1 OF 1	REV A

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	MATL		HT TR	—	FIN	— 
	DVN		APVD	<u><i>Top-Link</i></u> Electronics Top-Link Electronics Ltd.		
	QIN					
	REL					
	CHK					
0	= ±—					
0.0	= ±0.15					
0.00	= ±0.10					

100635-3
PART NUMBER

USED ON