
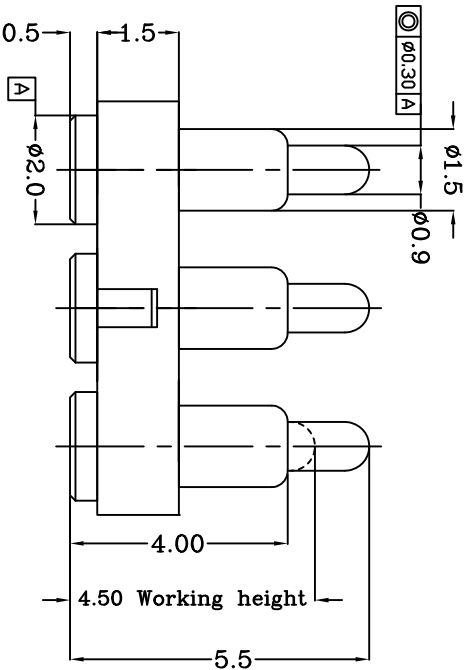



proposal

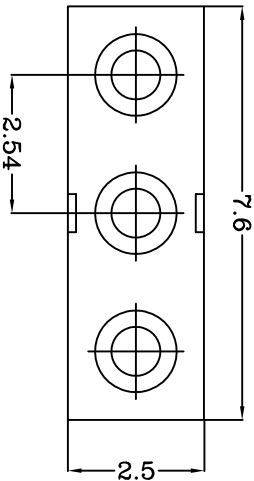

Notes:

- 1 Demensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
- Resistance: 50mOhm Max.Current rating: 2.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

TOP-LINK

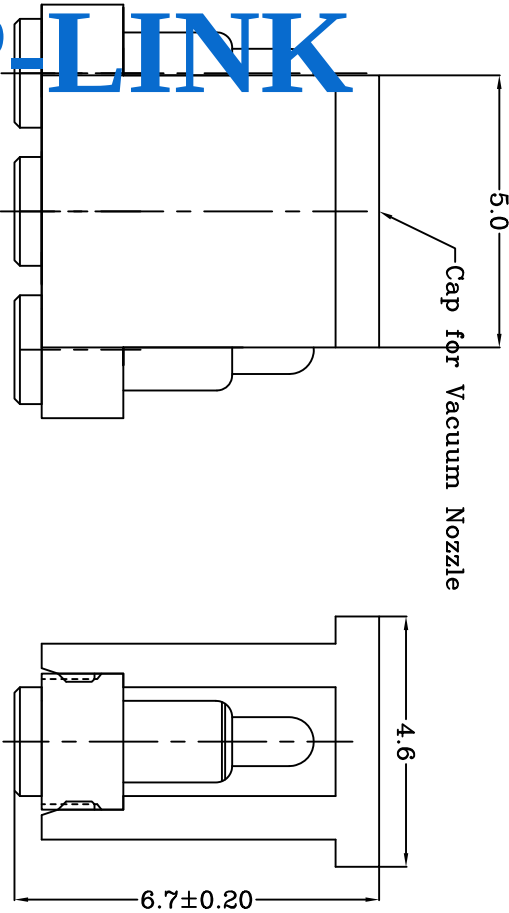

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance

Working height	4.50mm	75±25gf <2.1>
Durability	10000cycle	

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin Zuozhong	APVD:			100774-3
0.0 = ±0.15		CHK:		REL:			
0.00 = ±0.10		Name					Top-Link Electronics
0.000 = ±0.05		Customer drawing					Top-Link Electronics Ltd.
SURF. TEXTURE: REMOVE SHARP EDGES		Scale	Size	DWG No.	Page	Rev.	
BREAK SHARP EDGES		1:1	A4	C-100774	1/1	1	
SCALE PRINT.							

DIST

Rev.	NEW	2011/12/28
Revision record.		
Date.		