
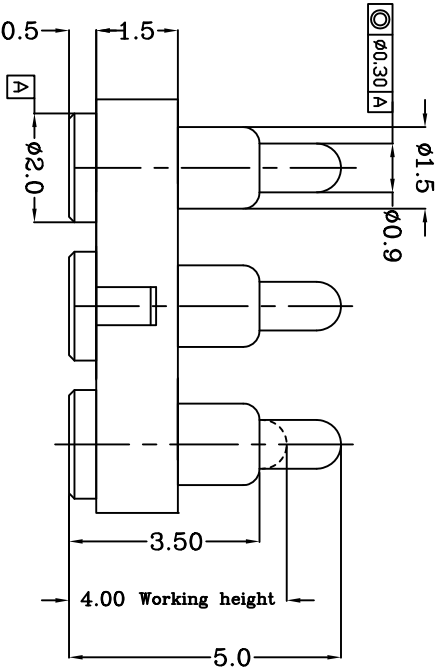



proposal

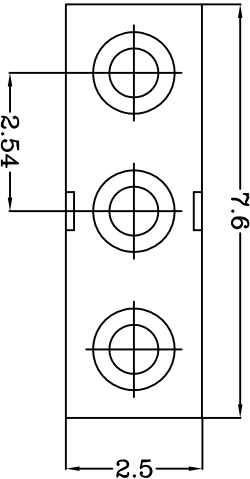

Notes:

- 1 Demensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance: 200mOhm Max.Current rating: 1.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

TOP-LINK

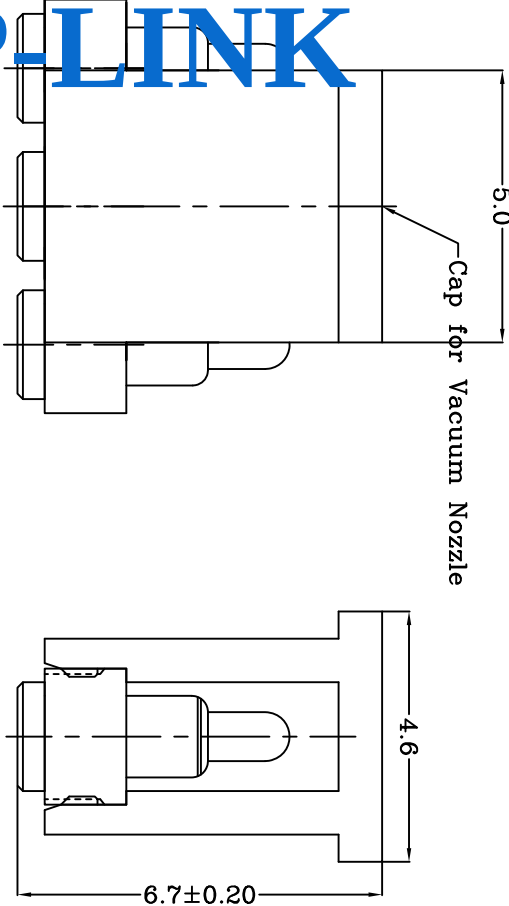

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance

Working height	4.00mm	35±15gf <2.1>
Durability	10000cycle	

Top-Link Electronics Ltd. TOLERANCES UNLESS OTHER SPECIFIED 0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± 0.005 Angle: ±1° SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.	Type	Customer drawing	Unit	mm	Weight	
	DWN:	Qin Zuozhong	APVD:	Top-Link Electronics Top-Link Electronics Ltd.		
	CHK:		REL:			
	Name					
	Customer drawing					
	Scale	Size	DWG No.			
	1:1	A4	C-100782			
	Page					1/1
	Rev.					1

Top-Link
Electronics

Top-Link
Electronics Ltd.

DIST

Rev.	NEW	2012/02/04
Revision record.		
Date.		