

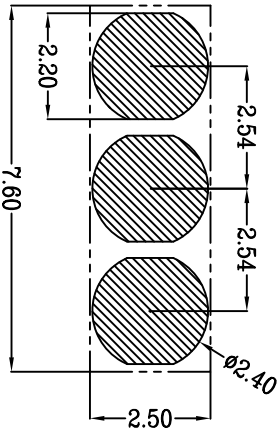


DWN No.:
C-110317

proposal

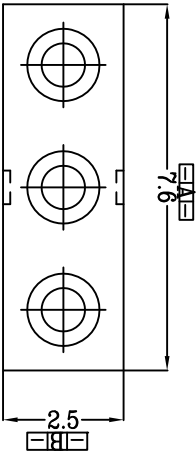

Recommended PCB Layout

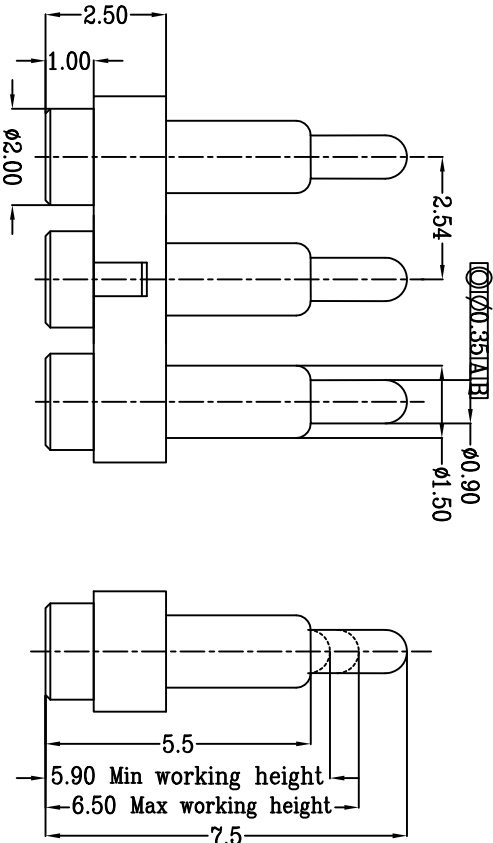

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger
bees downwards and upwards.
- 3 Electrical performance
Resistance:30m0hm Max.Current rating: 2.0A
5 RoHS compliant.

Table 1 Mechanical performance			
Max working height	6.50mm	80gf min<2.1>	
Min working height	5.80mm	165±35	
Durability	10000cycle		

Item	Part name	q'ty/Ea	Material	Finish
1	HSG	1	High temp Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5				

Top-Link Electronics Ltd.			
TOLERANCES UNLESS OTHER SPECIFIED			
0.0	=	±	
0.0	=	±	0.15
0.00	=	±	0.10
0.000	=	±	
Angle:	±1°		
SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT.			
Type	Customer drawing	Unit	Weight
DWN:	Qin Zuozhong	mm	
CHK:	REL:		
Name		Customer drawing	
Scale	Size	DWG No.	Page
1:1	A4	C-110317	1/1
		Rev.	A

Top-link
Electronics Ltd.

PART NUMBER

110317-3

Rev.	NEW	2011/08/09
Revision record.		Date.

4

3

2

1