




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

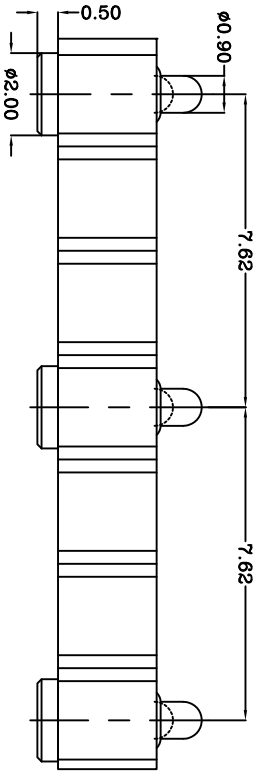

DWG NO.
C-110667

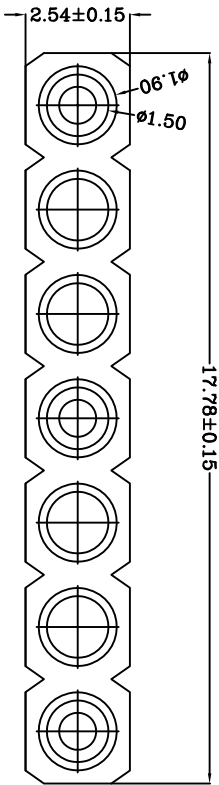

TOP-LINK

Notes:
1) Material (材质):

Housing: PA 4.6 (30% Glass Filled) Color Black.

Contact: Brass

Spring : Stainless steel wire

2 Plating:

1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Total stroke (总行程): 0.90mm

Durability (寿命): 10,000 cycle min.

4 Electrical (电性能)

Contact resistance (接触电阻): 30mOhm Max.

Voltage rating (额定电压): 36V DC Max

Current rating (额定电流): 2.0A

USED ON

-

110667-3

PART NUMBER

A

B

C

D

DIMENSIONS IN MM			
TOLERANCES UNLESS			
OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
NAME PGGD CONNECTOR			
SCALE 1:1	A4	DWG NO.	C-110667
PGC-15-4.0-R-3P-7.62PH			
SHEET 1 OF 1			
REV 1			

Top-Link
Electronics Ltd.

NEW		2008/03/19
REVISION		
RECORD		
APVD		
DATE		

LDC	-
DIST	-

4

3

2

1