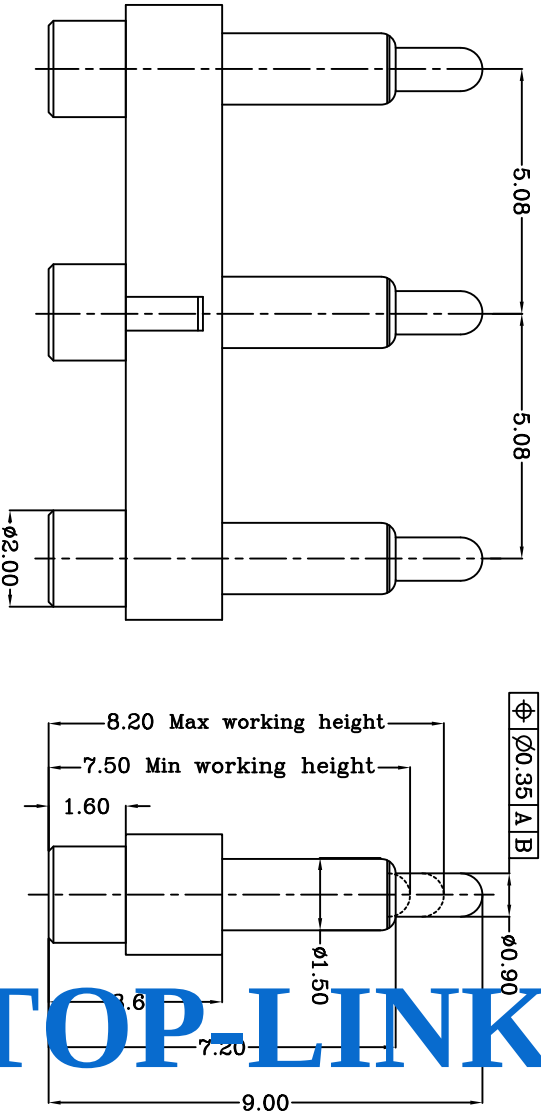
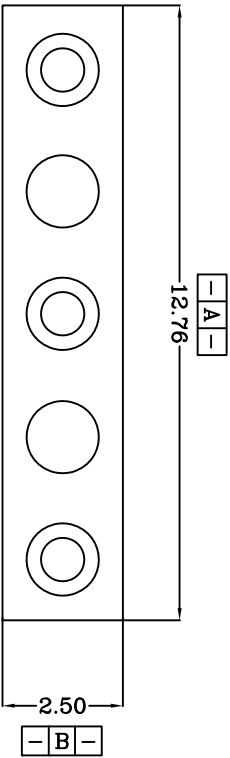


TOP-LINK

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp,Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp,Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance		
Max.working height	8.20mm	gf <2.1>
Min.working height	7.50mm	gf
Durabiility	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning:Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 Packaging Spec.Comformance to EIA 481
 - 5 RoHS compliant.

Top-Link Electronics Ltd. TOLERANCES UNLESS OTHER SPECIFIED		Type Customer drawing		Unit mm		Weight		PART NUMBER	
0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± 0.05		DWN: Qin Zuozhong		APVD:		110713-3		110713-3	
Angle: ± 1° SURF. TEXTURE: REMOVE SHARP EDGES BREAK SHARP EDGES R0.05 MAX,DO NOT SCALE PRINT.		CHK: REL:		Name Customer drawing		Top-Link Electronics Ltd.		PRT NUMBER	
Scale 1:1		Size A4		DWG No. C-110713		Page 1/1		Rev. 1	
Rev.		Revision record.		Date.		NEW		2011/07/14	
DIST		DIST		DIST		DIST		DIST	
4		3		2		1		1	