


Recommended PCB Layout

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp. Plastic U194 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5				

Table 1 Mechanical performance

Table 1 Mechanical performance		
Max. working height	6.70mm	40±15gf <2.1>
Min. working height	5.90mm	80±25gf
Durability	10000cycle	

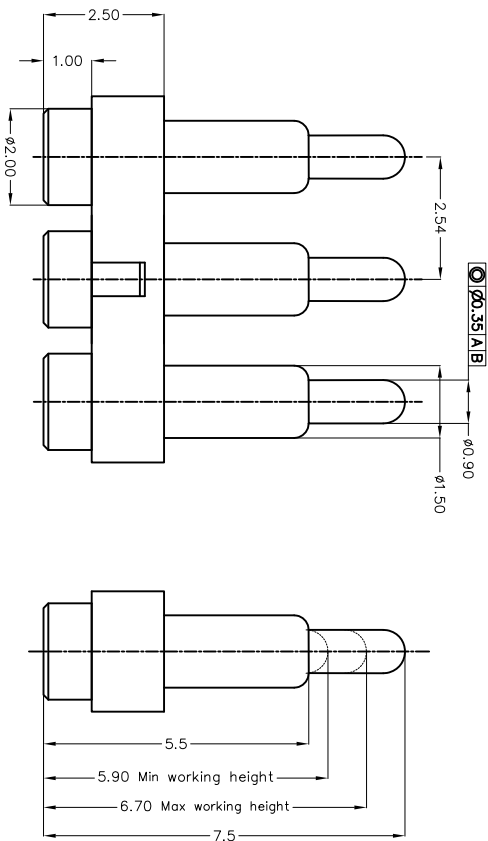

Notes:

Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

$\langle F \rangle$ The force is the average of forces obtained when plunger

ges downwards and upwards.

<?2>Warning: Working height are not permitted to be less

man Min working height.

3 Electrical performance

Resistance: 100mOhm Max.Current rating: 0.5A

5 RoHS compliant.

TOP-LINK

| |
|-------------|
| 110734-3 |
| PART NUMBER |

| Top-Link
Electronics Ltd. | Type | Customer drawing | Unit | mm | Weight |
|--|--------------|------------------|---|------|--------|
| TOLERANCES UNLESS
OTHER SPECIFIED | DWN: | APVD: | <div> <div>Top-Link</div> <div>Electronics</div> <div>Electronics Ltd.</div> </div> | | |
| 0.0 = ± 0.15
0.00 = ± 0.10
0.000 = ± | Qin Zuozhong | REL: | | | |
| Angle: #1
SURF TEXTURE:
REMOVE BURRS.
BREAK SHARP EDGES
R0.05 MAX.DO NOT
SCALE PRINT. | Name | Customer drawing | | | |
| | Scale | Size | DWG No. | Page | Rev. |
| | 1:1 | A4 | C-110734 | 1/1 | 1 |
| | 2 | | | 1 | |