


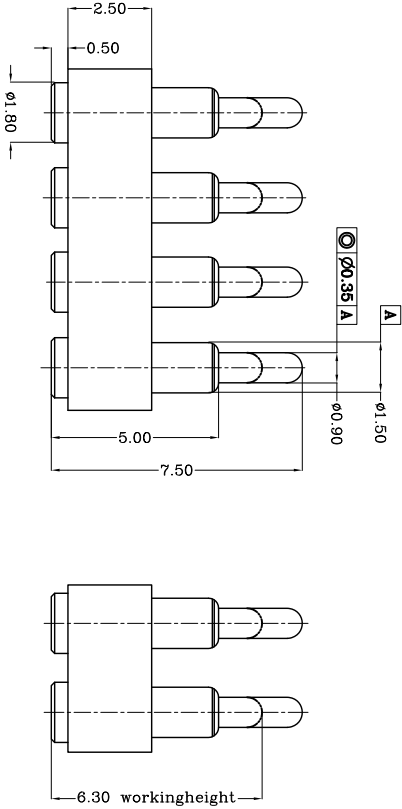
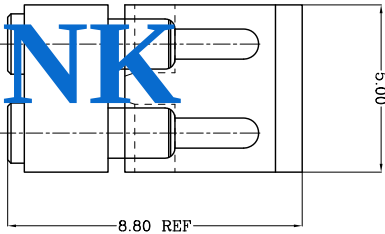


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

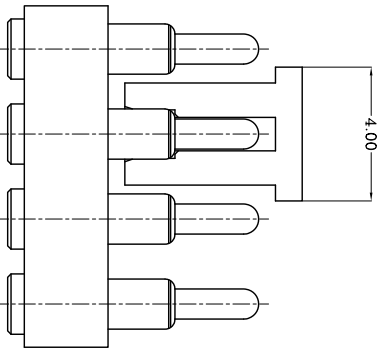

DWN No.:
C-100899

proposal

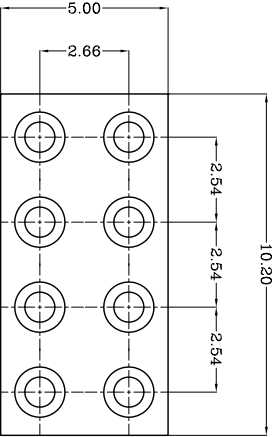

TOP-LINK

Item	Part name	Qty/Ea	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	8	Leaded Brass	Gold plating over Nickel plating
3	Plunger	8	Leaded Brass	Gold plating over Nickel plating
4	Spring	8	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance		
working height	6.30mm	120±30gf <2.1>
Durability	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 Packaging Spec.Comformance to EIA 481
 - 5 RoHS compliant.

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		100899-8
0.0	±0.15	DWN:	APVD:		
0.00	±0.10	CHK:	REL:		
0.000	±0.05	NAME	Customer drawing		
Angle: ±1°		Scale	Size	DWG No.	Page
SURF. TEXTURE:		1:1	A4	C-100899	1/1
REMOVE BURRS.					Rev. 1
BREAK SHARP EDGES					
RO.05 MAX.DO NOT					
SCALE PRINT.					

DIST

Rev.	NEW	2012/07/30
Revision record.		
Date.		