


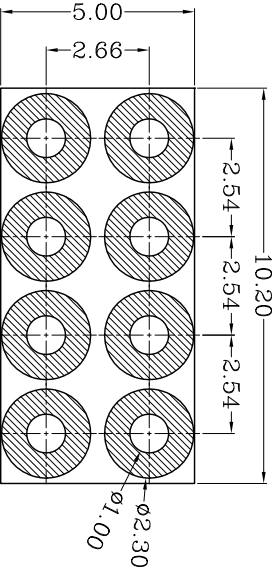


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

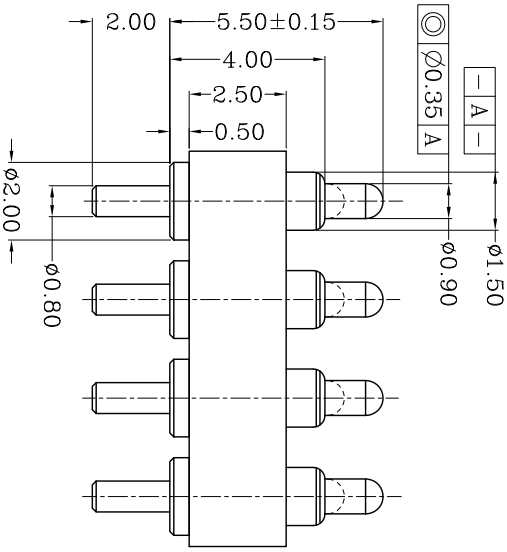


DWN No.:
C-110807

proposal

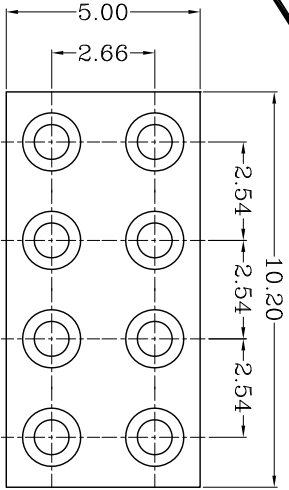

Recommended PCB Layout



TOP-LINK

Item	Part name	Qty/Ed	Material	Finish
1	HSG	1	High temp. Plastic UL94 V-0 Color Black	_____
2	Body	8	Leaded Brass	Gold plating over Nickel plating
3	Plunger	8	Leaded Brass	Gold plating over Nickel plating
4	Spring	8	Stainless steel wire	_____
5				

Table 1 Mechanical performance		
Working height	4.50mm	75±25gf <2.1>
Durability	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
 - 4 RoHS compliant.

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Customer drawing	mm	110807-8	
0.0 = ±0.15		CHK:	Cai wonlu	APVD:	PART NUMBER	
0.00 = ±0.10		REL:				
0.000 = ±0.005		Name		Customer drawing	Top-Link Electronics Ltd.	
SURF. TEXTURE:		Scale		PGC-1.5-5.5-2R-8P-2.54PH/2.66PH		
REMOVE BURRS:		Size		A4		
BREAK SHARP EDGES		DWG No.		C-110807		
R0.05 MAX DO NOT SCALE PRINT.		Page		1/1		

DIST

1.1	Update	2014/05/26
1	NEW	2012/04/19
Rev.	Revision record.	Date.

4

3

2

1