


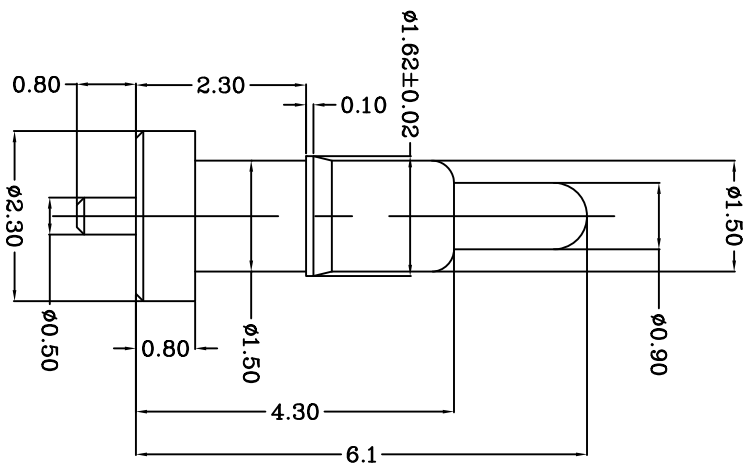

Notes:  Material(材质):

- 1) Body : Brass
- 2) Plunge : Brass
- 3) Plating (电镀):
 - 1) Body : Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical (机械性能):
 - 1) Force: 90gf min per pin at 1.2mm stroke (压力1.2mm的力: 90gf min)
 - 2) Total stroke (总行程) : 1.50mm
 - 3) Reliability (寿命): 10,000 cycle min.
- 4 Electrical (电性能)
 - 1) Contact resistance (接触阻抗): 30mOhm Max.
 - 2) Voltage rating (额定电压): 36V DC Max
 - 3) Current rating (额定电流): 2.0A

LDC	-
DIST	-

update TH		2010/09/16
LTR	REVISION RECORD	APVD DATE

DIMENSIONS IN MM		MATERIAL		HT TR		FIN	
TOLERANCES UNLESS OTHER SPECIFIED		A1		—		— V	
0	= ±	DWN	APVD	<i>Top-Link</i> Electronics		Top-Link Electronics L td.	
0.0	= ±0.15	QIN					
0.00	= ±0.10	CHK	REL				
0.000	= ±						
ANGLE: ±1°							
SURF TEXTURE: 32/		NAME					
REMOVE BURRS, BREAK		PGGD PIN					
SHARP EDGES R0.05 MAX		PG-0.5-0.8-2.3-0.8-1.5-4.3-6.1					
DO NOT SCALE PRINT		SCALE	A4	DWG NO.	C-101099	SHEET 1 OF 1	REV C1

101099-1
PART NUMBER