


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101152

DIST

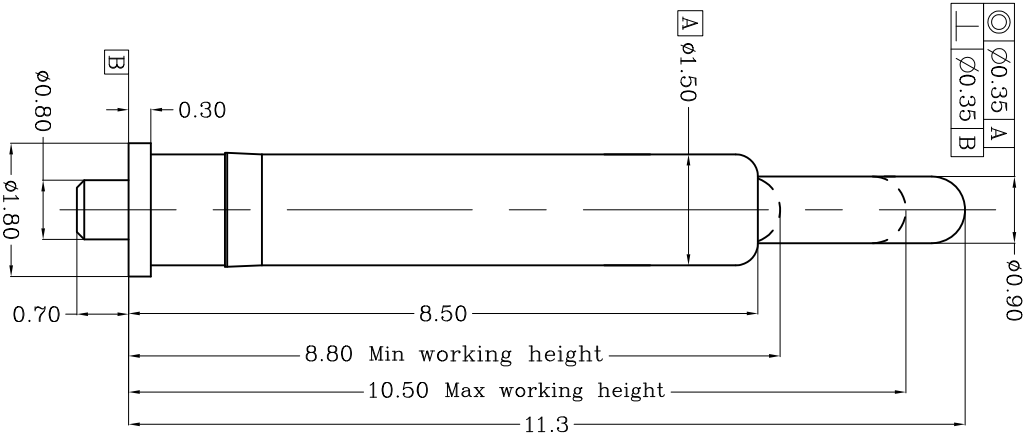


Table 1 Mechanical performance		
Max.working height	10.50mm	85±20gf <3.1>
Min.working height	8.80mm	215±50 gf
Durability	10000Cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <3.1> force is the average of forces obtained when plunger goes downwards and upwards.
- <3.2>Warning: Working height are not permitted to be less than min working height.
- 3 Electrical performance
- Resistance: 50mOhm Max.
- Current rating: 2.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

Item	Part name	Qty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Gold plating over Nickel plating
2	Plunger	1	Leaded Brass	Gold plating over Nickel plating
3	Spring	1	Stainless steel wire	_____
4				
5				

Rev.	NEW	2011/03/24
Revision record.		
Date.		

Top-Link Electronics Ltd.		Type	Unit		Weight	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing		mm		
0.0 = ±0.15		DWN:	APVD:		Top-Link Electronics Top-Link Electronics Ltd.	
0.00 = ±0.10		CHK:	REL:			
0.000 = ±0.050		Name				
Angle: ±1°						
SURF. TEXTURE:						
REMOVE BURRS.						
BREAK SHARP EDGES						
R0.05 MAX. DO NOT SCALE PRINT.		POGO PIN PG-2.0-1.2-6.0-1.0-3.0-11.0-15.00				
Scale		1:1	Size	A4	DWG No.	C-101152
					Page	1/1
					Rev.	A

Top-Link Electronics Ltd.

101152-1
PART NUMBER