


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101153

proposal

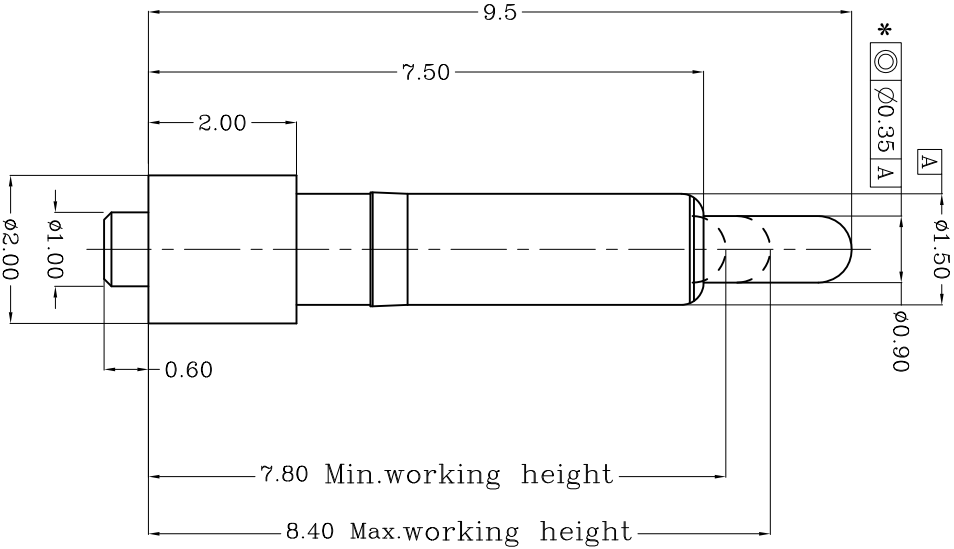


Table 1 Mechanical performance		
Max working height	8.4mm	120±30gf <2.1>
Min working height	7.8mm	165±35fg min
Durability	10000cycle	

- Not
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Warning: Working height are not permitted to be less than the working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 2.0A
 - 4 RoHS compliant.

TOP LINK

Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Type	Unit	Weight	PART NUMBER
------	------	--------	-------------

Top-Link Electronics Ltd.	Customer drawing	mm	
---------------------------	------------------	----	--

TOLERANCES UNLESS OTHER SPECIFIED	DWN:	APVD:	Top-Link Electronics Ltd.
0.0 = ±0.15	CHK:	REL:	
0.00 = ±0.10			
0.000 = ±0.05			
Angle: ±1°			
SURF. TEXTURE:			
REMOVE BURRS:			
BREAK SHARP EDGES			
RO.05 MAX.DO NOT SCALE PRINT.			

Name	POGO PIN		
Scale	1:1	Size	A4
DWG No.	C-101153	Page	1/1
Rev.	1		