



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO. C-101170

LDC
-
DIST
-

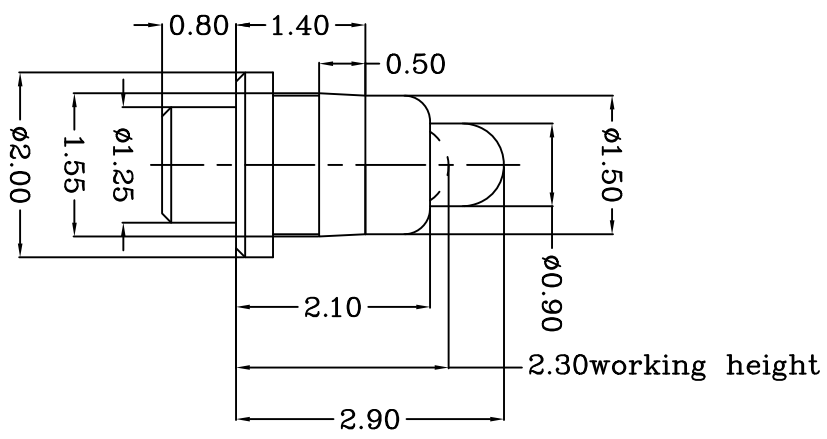

LTR	REVISION RECORD	APVD	DATE
	NEW		2024/04/19
			2024/07/09

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
NAME	SCALE	DWG	NO.
PGGD PIN	1:1	A4	
PG-1.0-0.8-1.5-2.1-2.9			
C-101170			
SHEET 1 OF 1			
REV B			

101170-1
PART NUMBER

Notes
1) Plunger & Body : CuZn36 Pb3, HO2 (C36000)
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
3) Spring : Stainless steel wire
4) Plating
1) Body : Min 0.1um Gold plating over min. 1.4um Nickel plating
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
3) Spring Force: 108±22gf .
1) Total stroke : 0.7mm
2) Durability: 10,000 cycle min.
3) Spring Force: 108±22gf .
1) Electrical
1) Contact resistance: 30mOhm Max.
2) Operating voltage: 36VDC

USED ON -