


Notes:
△ Material(材质):

- 1)Body : Brass
 - 2)Plunge : Brass
 - 3)Spring : Stainless steel wire
- 2 Plating(电镀):
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
 - 3 Mechanical(机械性能):
 - 1)Force: 50±10gf per pin at 1.0mm stroke (力: 下压1.0mm的力: 50±10gf)
 - 2)Total stroke(总行程) : 1.30mm
 - 3)Durability(寿命): 10,000 cycle min.
 - 4 Electrical(电性能)
 - 1)Contact resistance(接触抵抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 2.0A

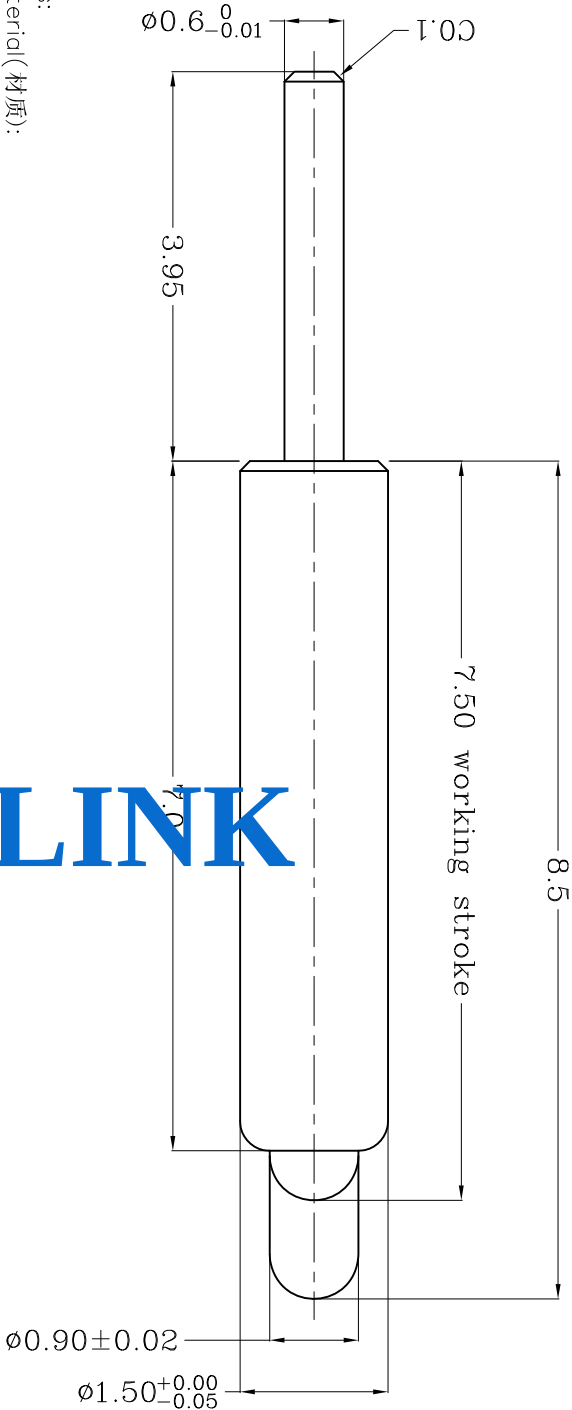

TOP-LINK

USED ON -

101190-1
PART NUMBER

Top-Link
Electronics Ltd.

	修改公差		2010/08/02
	缩短0.5mm		2010/08/14
	NEW		2009/04/24
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	
0	= ±
0.0	= ±0.15
0.00	= ±0.10
0.000	= ±
ANGLE: ±1°	
SURF TEXTURE: 3.2/	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

MATL		HT TR		FIN	
DWN		APVD		REL	
CHK		REL		REL	
NAME		PGGD PIN		PG-0.6-3.95-1.5-7.0-8.5	
SCALE		A4		DWG NO.	
1:1		A4		C-101190	
SHEET		1 OF 1		REV C	