




DIST

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Total stroke : 3.4mm
 - 3 Electrical performance
Resistance:50mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

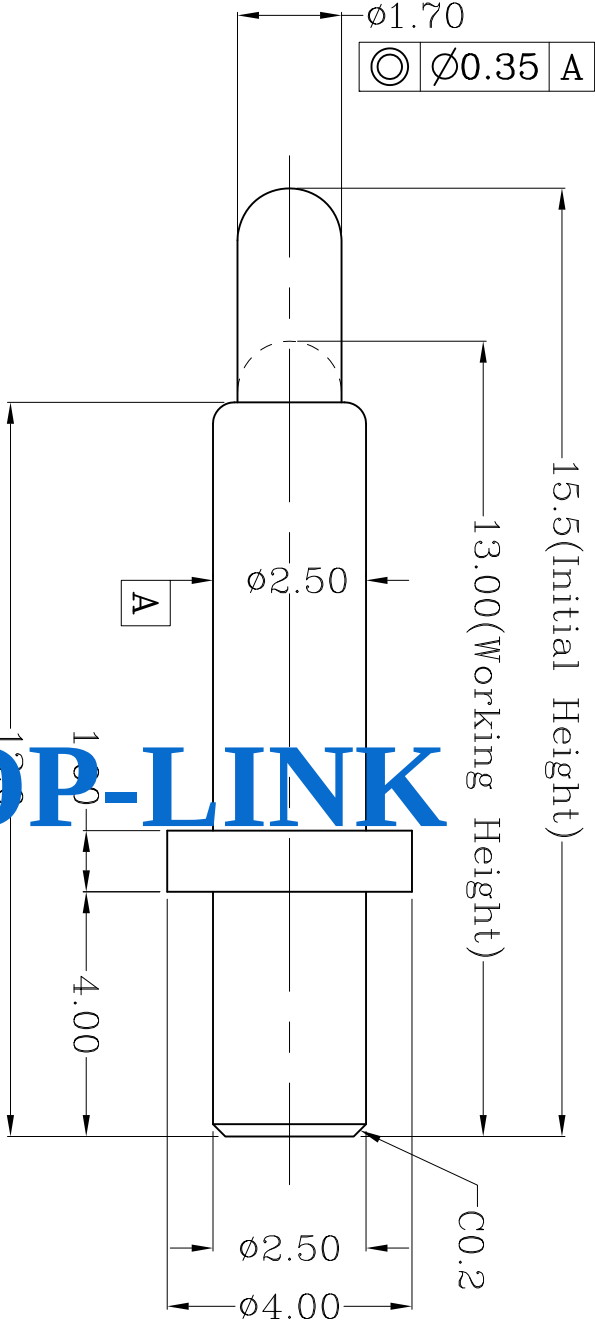

TOP-LINK

Table 1 Mechanical performance

working height	13.0mm	80±25gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

		Top-Link Electronics Ltd.		Type	Customer drawing		Unit	mm		Weight		
		TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong		APVD:					
		0.0 = ±0.15		CHK:			REL:	Top-Link Electronics Top-Link Electronics Ltd.				
		0.00 = ±0.10										
		0.000 = ±0.005										
		Angle: ±1°										
		SURF. TEXTURE: REMOVE BURRS										
		BREAK SHARP EDGES R0.05 MAX.DD NOT SCALE PRINT.										
				Name	POGO PIN							
				Scale	1:1	Size	A4	DWG No.	C-101207		Page	1/1