



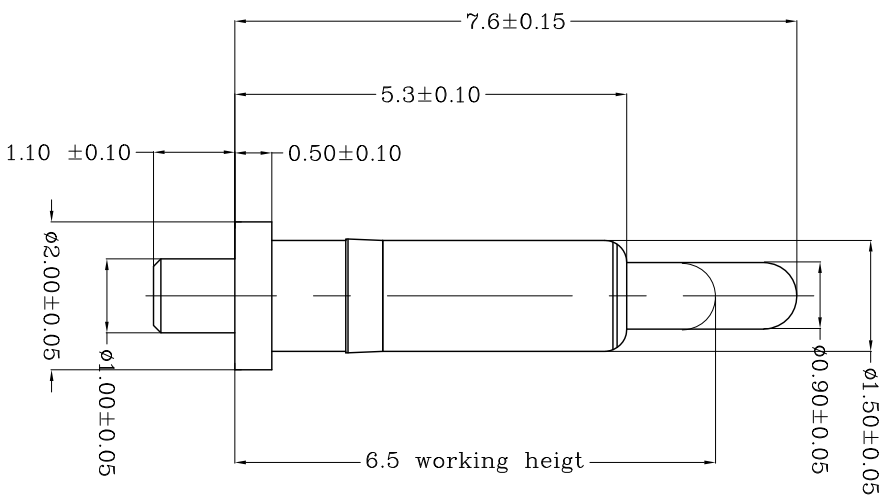

TOP-LINK

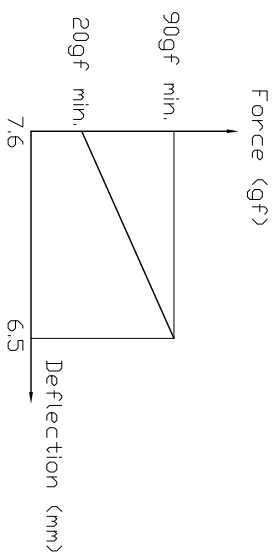

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire

- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3
Mechanical
 - 1)Total stroke : 1.4mm
 - 2)Durability: 10,000 cycle min.
- 4
Electrical
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

LDC				ANGLE: 11	NAME	PGGD PIN		
-		NEW	080625	SURF TEXTURE: 32/ V REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	SCALE	PG-1.0-1.1-2.0-0.5-1.5-5.3-7.6	DWG NO.	REV
DIST	LTR	REVISION RECORD	APVD	DATE	1:1	A4	C-101220	A
-								

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	MATL	HT TR	FIN
0 = ±	DWN	APVD	—
0.0 = ±0.15	aln		Top-Link
0.00 = ±0.10			Electronics
0.000 = ±	CHK	REL	Electronics L.td.
0.000 = ±.1*			

101220-1
PART NUMBER