




LDC
-
DIST
-

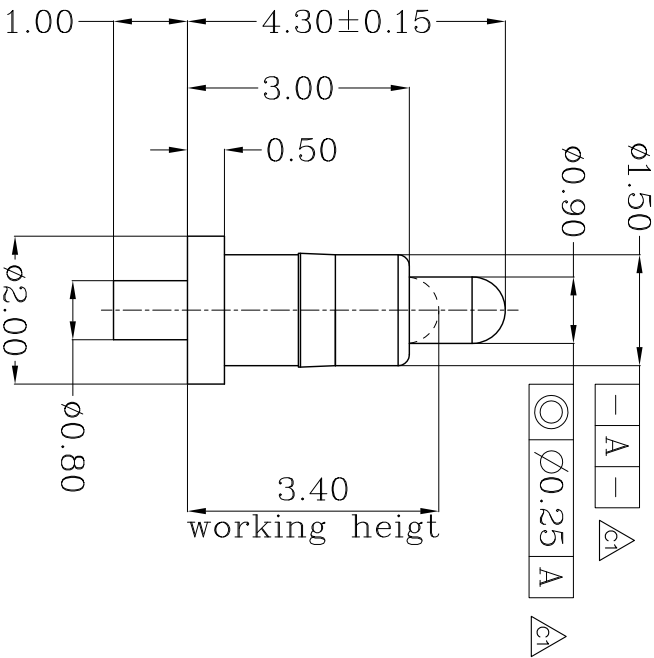

Recommended PCB Layout

TOP-LINK

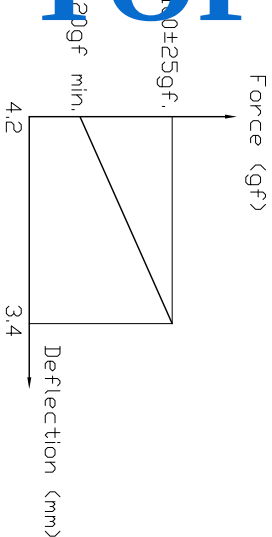

Notes:
1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 Pb3 or CuZn38 Pb2.
2)Spring : Stainless steel wire
2 Plating
1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
Mechanical
1)Total stroke : 1.2mm
2)Durability: 10,000 cycle min.
Electrical
1)Contact resistance: 50mOhm Max.
2)Operating voltage: 36VDC

C1	Update	121231
C	PP 加长	080919
B	Add body length	080901
A	NEW	080813
L TR	REVISION RECORD	APVD DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±	121231	
0.0	= ±0.15	080919	
0.00	= ±0.10	080901	
0.000	= ±	080813	
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN	APVD		
CHK	REL		
NAME	POGDO PIN		
SCALE	1:1	DWG NO.	C-101257
A4			
SHEET	1 OF 1	REV	C1

USED ON

-

101257-1

PART NUMBER

Top-Link
Electronics Ltd.