


DWG NO.
C-101267

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

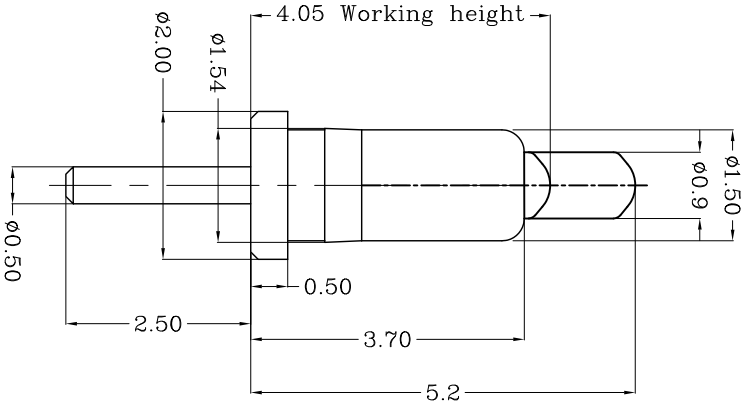

TOP-LINK

Notes:

- △ Material(材质):
1) Body : C36000
2) Plating : C36000 or C27000
3) Sealing : Stainless steel wire
2) Plating(电镀):
1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
2) Body: 镀金0.1um Min 镍底1.4um Min)
3) Plating: Min 0.4um Gold plating over min. 1.4um Nickel plating
4) Plating: 镀金0.4um Min 镍底1.4um Min)
3) Mechanical(机器性能):
1) Force(力):
2) Stroke to 4.05mm length and measure force: 90gf Min
(压缩到4.05mm的力: 90gf Min)
3) Total stroke(总行程) : 1.50mm
4) Durability(寿命): 10,000 cycle min.
5) Electrical(电性能)
1) Contact resistance(接触抵抗): 30mOhm Max.
2) Voltage rating(额定电压): 36V DC Max
3) Current rating(额定电流): 2.0A

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±	-		0.0	= ±0.15		
0.00	= ±	0.10		0.000	= ±		
ANGLE: ±1°							
SURF. TEXTURE: 32/							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
NAME	PGGD PIN	HT TR	FIN	DWN	APVD	REL	Top-Link Electronics
SCALE	1:1	A4	DWG NO.	REL			
SCALE	1:1	A4	DWG NO.	REL			
SCALE	1:1	A4	DWG NO.	REL			

NEW				
REVISION				
RECORD				
DATE				

4

3

2

1

USED ON

-

101267-1

PART NUMBER

A

B

C

D