



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO. C-101276

LDC
-
DIST
-

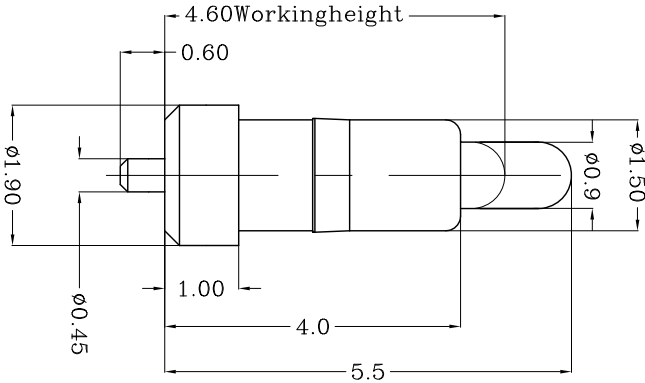

TOP-LINK

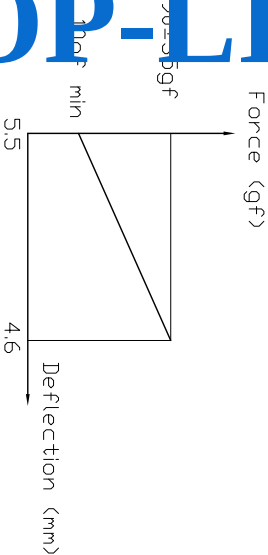

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38, PB2 or CuZn36(C2700).
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: 0.1um Gold plating over min. 1.4um Nickle plating
- 2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
- 1)Total stroke : 1.0mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED DN -

DIMENSIONS IN MM				MATL		HT TR		FIN	
TOLERANCES UNLESS OTHER SPECIFIED						—			
0	= ± -			DWN	APVD		Top-Link		
0.0	= ±0.15			QIN	Lansing		Top-Link		
0.00	= ± 0.10			CHK	REL		Electronics L.td.		
0.000	= ± -			Jin					
ANGLE: ±1°									
SURF TEXTURE: 32/				NAME					
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				POGGO PIN					
DO NOT SCALE PRINT				PG-0.45-0.6-1.9-1.0-1.5-4.0-5.5					
SCALE		A4		DWG		C-101276		SHEET	
1:1				ND.				1 OF 1	
								REV	
								1	

101276-1

PART NUMBER

A

B

C

D

4

3

2

1