



DWG NO.
C-101287

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

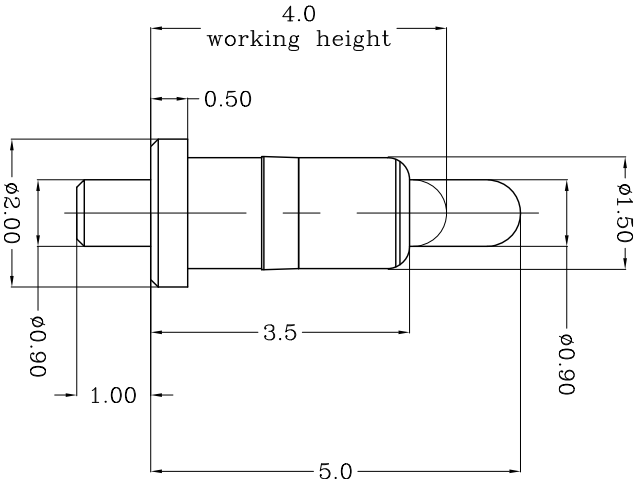

TOP-LINK

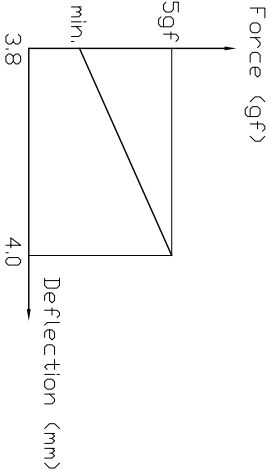

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
- 1)Total stroke : 1.2mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED ON

-

DIMENSIONS IN MM			
TOLERANCES UNLESS			
OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN	Jim	APVD	Lansing
CHK	Andy		REL
NAME	POGO PIN		
SCALE	1:1	A4	DWG NO.
			C-101287
			PG-0.9-1.0-2.0-0.5-1.5-3.5-5.0
			Top-Link Electronics Ltd.
			Top-Link Electronics Ltd.

PART NUMBER

101287-1

A

B

C

D

4

3

2

1