




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101334

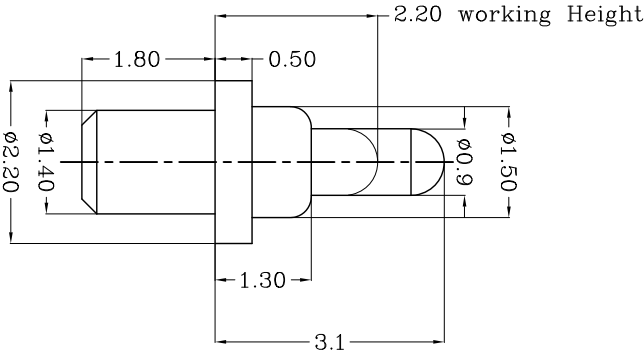

TOP-LINK

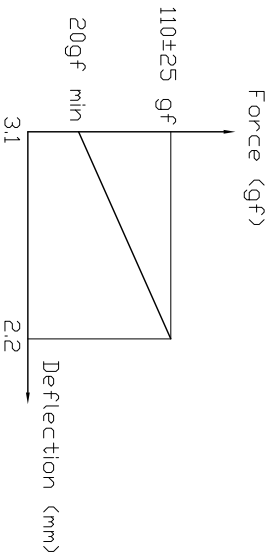

Notes:
Material:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2 or CuZn36(C2700).
- 2)Spring : Stainless steel wire
- 2)Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
- 1)Total stroke : 1.1mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED DN

-

LDC
-
DIST
-

NEW	8009/02/19
REVISION RECORD	
APVD	
DATE	

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	1	HT TR	-	FIN	-	✓
DWN	APVD	Lansing	Top-Link Electronics	Top-Link Electronics Ltd.		
CHK	REL					
Jim						
NAME	SCALE	A4	DWG NO.	C-101334	SHEET 1 OF 1	REV A
PGGD PIN Customer Drawing						
PG-1.4-1.8-2.2-0.5-1.5-1.3-3.1						

101334-1

PART NUMBER

A

B

C

D

4

3

2

1