




LOC
-
DIST
-

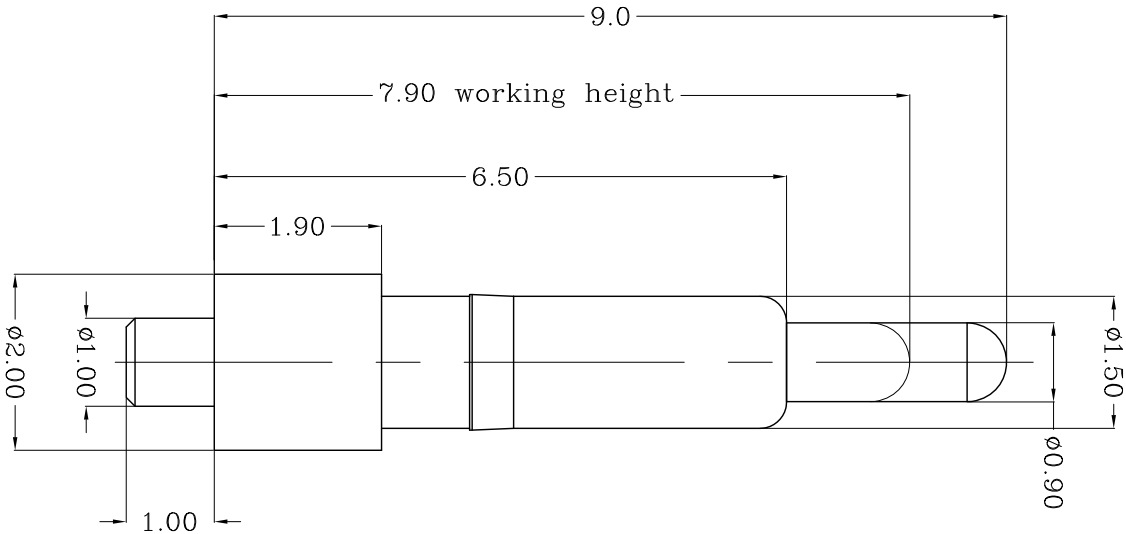

Recommended Solder paste thickness is 0.10 mm
Recommended PCB Layout

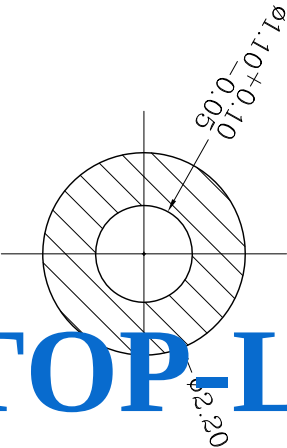

TOP-LINK

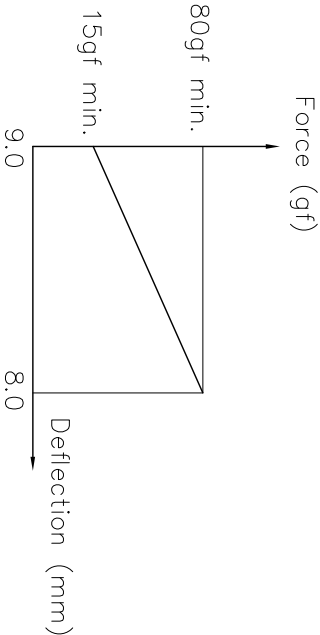

- Notes:
- Material:
- 1)Plunger & Body : Brass
 - 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: 0.1um Gold plating over min. 1.4um Nickle plating
 - 2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
- 1)Total stroke : 1.8mm

USED ON

-

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	=	$\pm$	-	0.0	=	± 0.15	
0.00	=	± 0.10		0.000	=	± 0.000	
0.000	=	$\pm$		ANGLE: $\pm 1^\circ$			
SURF TEXTURE: $3.2/\sqrt{}$				REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT			
NAME		POGO PIN					
SCALE		PG-1.0-1.0-2.0-1.9-1.5-6.5-9.0					
1:1		A4					
NO.		C-101353					
SHEET		1 OF 1					
REV		A					

MATL	HT TR	FIN
DWN	Qin	APVD
CHK	Andy	REL
Top-Link Electronics Ltd.		

101353-1
PART NUMBER

4

3

2

1