


proposal

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

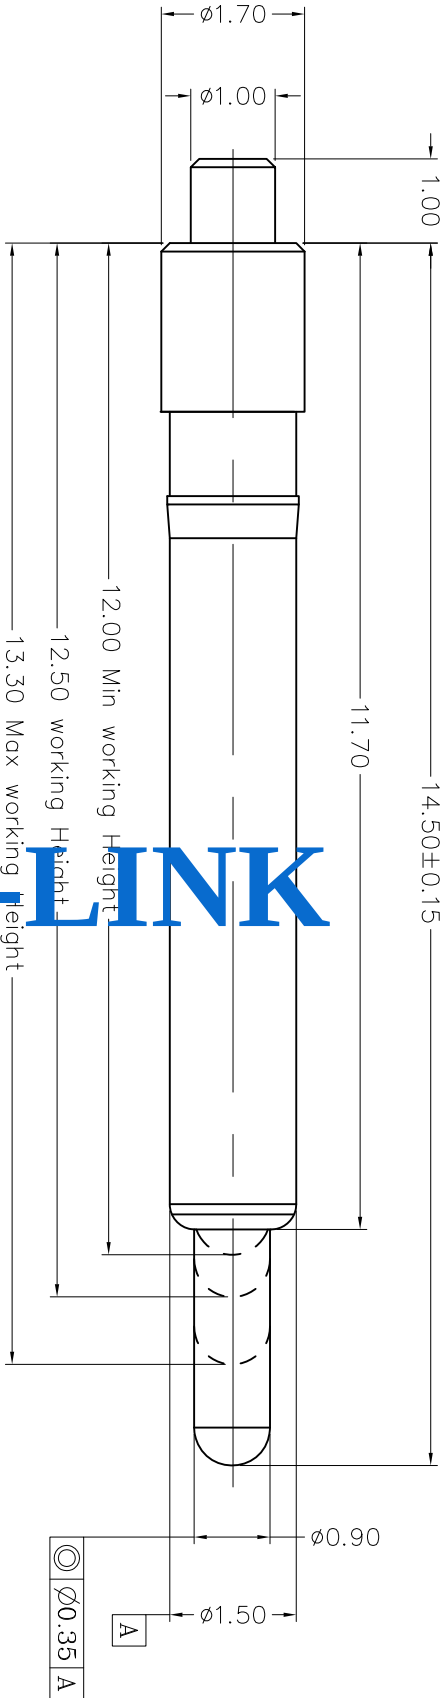

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
- Resistance: 30mOhm Max.
- Current rating: 2.0A
- 4 RoHS compliant.

Table 1 Mechanical performance		
Working height	12.50mm	180±35gf <2.1>
Durability	10000Cycle	

101375-1


PART NUMBER

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight	_____
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Cai wanlu	APVD:			
0.0 = ±0.15	CHK:		REL:			
0.00 = ±0.10						
0.000 = ±0.005	Angle: ±1°					
SURF. TEXTURE: REMOVE BURRS.	Name	POGO PIN				
BREAK SHARP EDGES R0.05 MAX,DO NOT SCALE PRINT.	Scale	1:1	Size	A4	DWG No.	C-101375
	Page	1/1	Rev.	A		

Top-Link Electronics Ltd.

A	Update	2015/12/26
1.1	NEW	2009/07/07
Rev.	Revision record.	Date.

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.: C-101375