

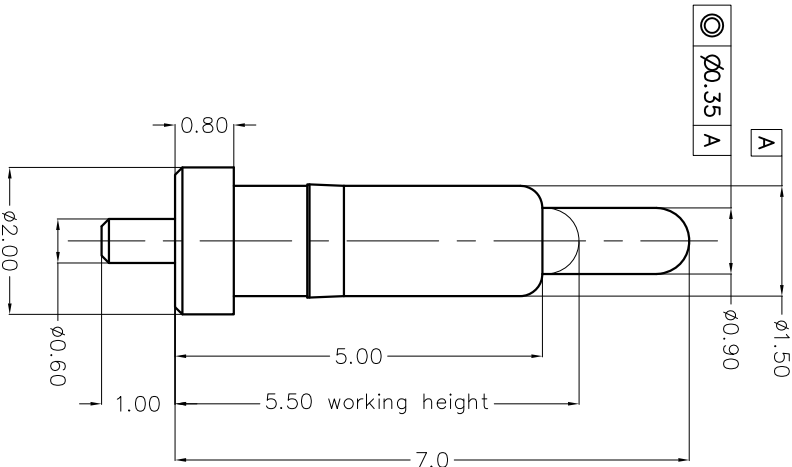



Table 1 Mechanical performance		
working height	5.50mm	80±35gf <2.1>
Durability	10000cycle	

- Not
- 1 Demnnsions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> Stroke force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.1> Total stroke : 1.9mm.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leoded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong	APVD:		 Top-Link Electronics Ltd.
0.0	± 0.15	CHK:		REL:		
0.00	± 0.10					
0.000	± 0.05					
Angle: $\pm 1^\circ$						
SURF. TEXTURE: REMOVE BURRS.						
BREAK SHARP EDGES						
R0.05 MAX. DO NOT SCALE PRINT.						
Name POGO PIN						
Scale	Size	DWG No.	C-101379		Page	Rev.
1:1	A4				1/1	C

DIST

	Renewal	2010/07/28
	NEW	2008/10/22
Rev.	Revision record.	Date.