



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101381

LDC
-
DIST
-

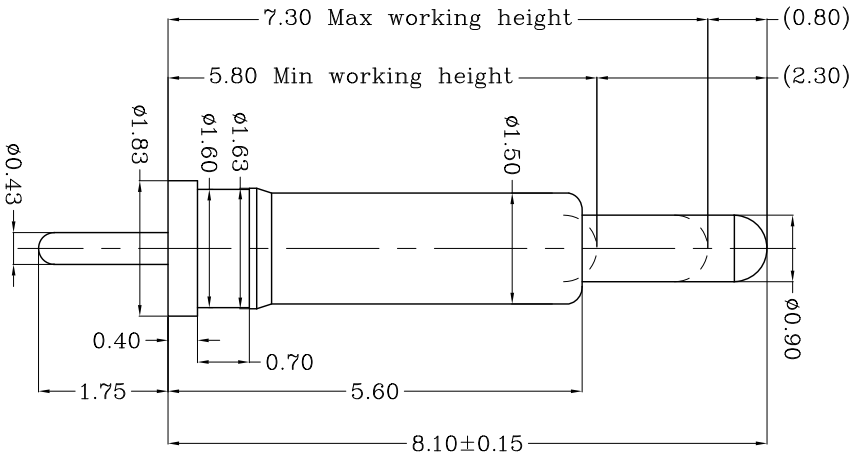

TOP-LINK

- Notes:
- 1)Material:
 - 1)Body : C36000
 - 2)Plunger: C36000 or C27000
 - 3)Spring : Stainless steel wire
 - 2)Plating
 - 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
 - 3)Mechanical
 - 1)Total stroke : 2.4mm
 - 2)Durability: 10,000 cycle min.
 - 4)Electrical
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC MAX.

LTR	REVISION RECORD	APVD	DATE
	NEW		2009/09/01
	Body加高0.4mm		2009/09/02

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT			
MATL	HT TR	FIN	
DWN	APVD		
CHK	REL		
NAME	PGGD	PIN	PG-0.43-1.75-1.83-0.4-1.5-5.6-8.1
SCALE	A4	DWG NO.	C-101381
1:1			
		SHEET	1 OF 1
		REV	B

101381-1
PART NUMBER

USED ON
-