


DWG NO.
C-101409

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

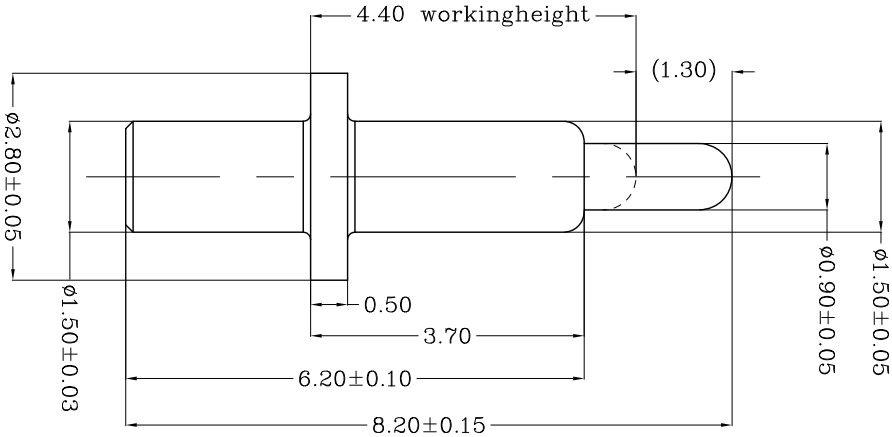

Notes:
△ Material(材质):

1)Body : Brass

2)Plunge : Brass

3)Plating : Stainless steel wire
2)Plating(电镀):

1)Body: 0.1um Gold plating over 1.4 Nickel plating

(Body: 镀金0.1um 镍底1.4um)

2)Plunger: Min 0.4um Gold plating over 1.4um Nickel plating

(Plunger: 镀金0.4um 镍底1.4um)

3)Durability(机械性能):

1)Force: 110±25gf per pin at 1.3mm stroke

(力: 下压1.3mm的力: 110±25gf)

2)Total stroke(总行程) : 2.00mm

3)Durability(寿命): 10,000 cycle min.

4)Electrical(电性能)

1)Contact resistance(接触抵抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

TOP LINK

USED ON
-

101409-1

PART NUMBER

MATL	△ 1	HT TR	FIN
DWN		APVD	
CHK		REL	

Top-Link
Electronics Ltd.

NAME
PGGD PIN

SCALE
1:1

REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX

DD NOT SCALE PRINT

修改电镀规格

NEW

L TR	REVISION	RECORD	APVD	DATE
				2009/12/10
				2010/07/02

4

3

2

1