


LDC	-
DIST	-

Notes:
△Material(材质):

- 1)Body : C36000
 - 2)Plunge : C36000
 - 3)Spring : Stainless steel wire
- 2 Plating(电镀):
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2)Plunger: Min 0.25um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.25um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
- 1)Force: 90±20gf per pin at 2.5mm(力:2.5mm的力:90±20gf)
 - 2)Total stroke(总行程) : 3.40mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
- 1)Contact resistance(接触抵抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 3.0A

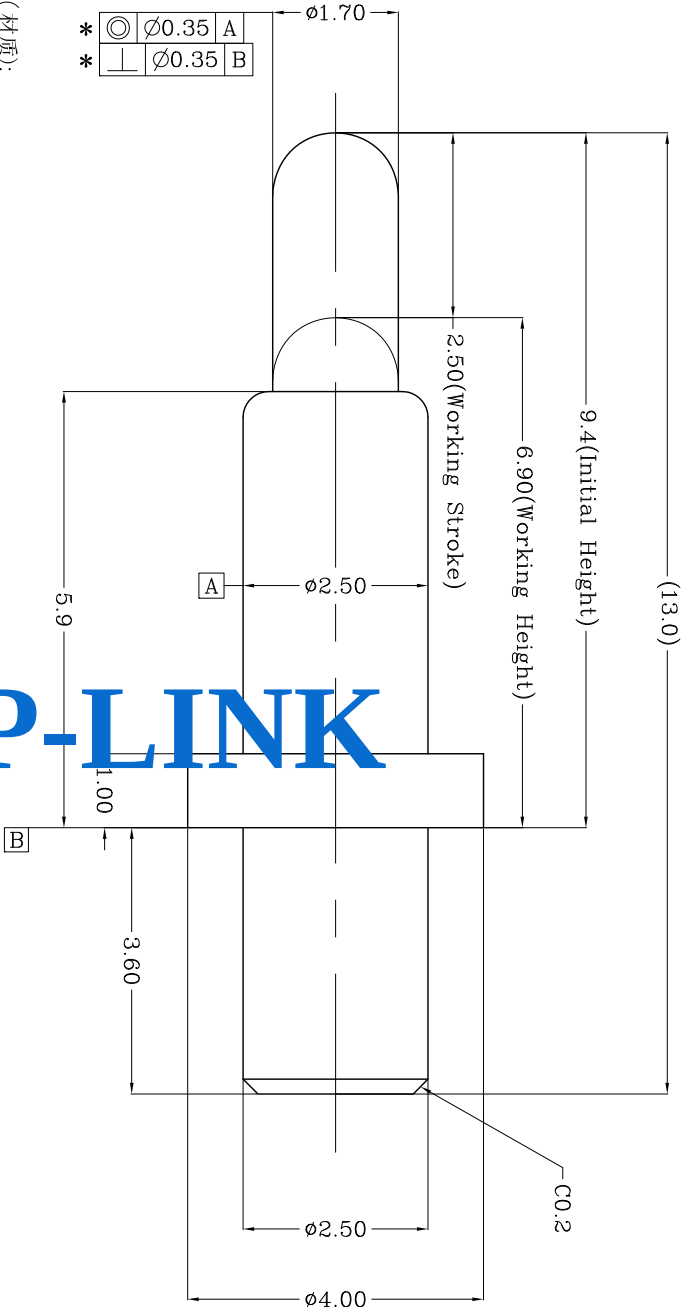

TOP-LINK

USED ON
-

101416-1

PART NUMBER

Top-Link
Electronics Ltd.

MATL	HT TR	FIN
△	-	✓

DWN	APVD	REL
Qin		
CHK	REL	

NAME
PGGD PIN
PG-2.5-3.6-4.0-1.0-2.5-5.9-13.0

SCALE	A4	DWG NO.	C-101416	SHEET 1 OF 1	REV A1
1:1					

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

4

3

2

1