


DWG NO. C-101449

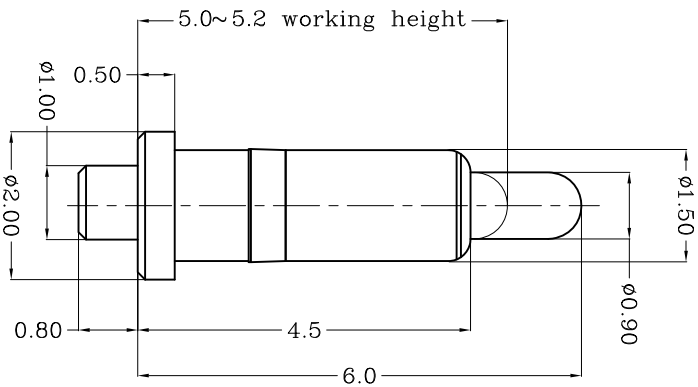

Notes:
 1 Material(材质):

- # OP LINK
- 1) Body : Brass
 - 2) Plunger : Brass
 - 3) Sounding : Stainless steel wire
- ## 2 Plating (电镀):
- 1) Body : Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- ## 3 Mechanical (机械性能):
- 1) Force: 135 ± 25 gf per pin at 1.0mm stroke
 - 2) Total stroke(总行程): 1.35 ± 25 gf)
 - 3) Total stroke(总行程): 1.20mm
- ## 4 Electrical (电性能)
- 1) Contact resistance(接触抵抗): 30mOhm Max.
 - 2) Voltage rating(额定电压): 36V DC Max
 - 3) Current rating(额定电流): 2.0A

LDC				NAME		POGD PIN				
-	NEW			2010/07/23		PG-1.0-0.8-2.0-0.5-1.5-4.5-6.0				
DIST	LTR	REVISION RECORD	APVD	DATE	SURF TEXTURE: 32/ V REMOVE BURRS, BREAK SHARP EDGES R.O.S MAX DO NOT SCALE PRINT					
-					SCALE 1:1	A4	DWG NO.	C-101449	SHEET 1 OF 1	REV 1

101449-1		PART NUMBER	
MATERIAL		HT TR	FIN
			
DWN	APVD	Top-Link Electronics Top-Link Electronics Ltd.	
Qim	REL		
CHK			
NAME			
PGGD PIN			
PG-1.0-0.8-2.0-0.5-1.5-4.5-6.0			
SCALE	A4	DWG NO.	C-101449
1:1		SHEET	REV
		1 OF 1	1

USED ON