



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101462

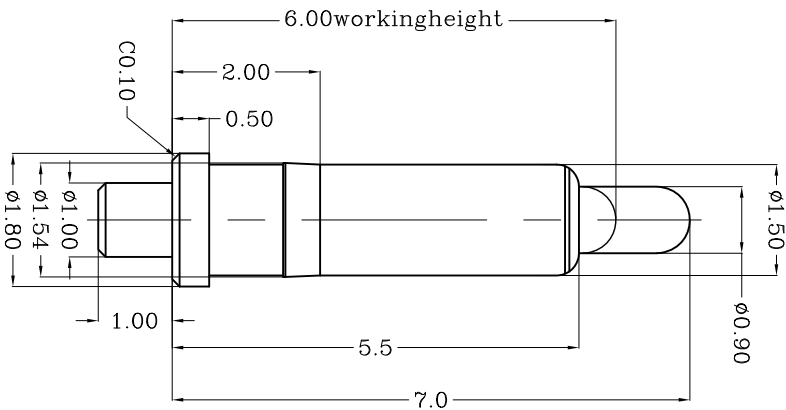

- Notes:
- 1) Material (材质):
 - 1) Body : Brass
 - 2) Plunger : Brass
 - 3) Spring : Stainless steel wire
 - 4) Plating (电镀):
 - 1) Bobby: Min 0.1um Gold plating over min. 1.4um Nickel plating
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
 - 3) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
 - 4) Mechanical (机械性能):
 - 1) Force: Min 90gf per pin at 1.0mm (力: 1.0mm 的力: min 90gf)
 - 2) Total stroke (总行程) : 1.40mm (力: 1.0mm 的力: min 90gf)
 - 3) Cycleability (寿命): 10,000 cycle min.
 - 4) Frictional (电性能)
 - 1) Contact resistance (接触抵抗): 30mOhm Max.
 - 2) Voltage rating (额定电压): 36V DC Max
 - 3) Current rating (额定电流): 2.0A

LDC	-
DIST	-

LTR	NEW	REVISION RECORD	APVD	DATE
				2010/10/03

DIMENSIONS IN MM		TOLERANCES UNLESS OTHER SPECIFIED	
0	= ±		
0.0	= ±0.10		
0.00	= ±0.05		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/		✓	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL		HT TR	—
		FIN — ✓	
DWN		APVD	
Qin			Top-Link
CHK		REL	Electronics
		Electronics L.td.	
NAME		POGO PIN	
		PG-1.0-1.0-1.8-0.5-1.5-5.5-7.0	
SCALE		DWG NO.	
1:1	A4	C-101462	
		SHEET 1 OF 1	REV 1

USED ON