


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101498

proposal

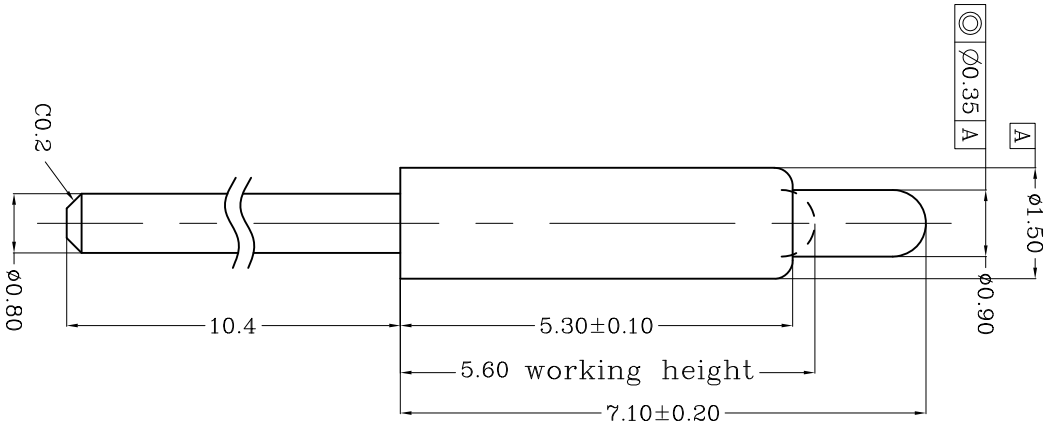

Not

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<3.1> The force is the average of forces obtained when plunger goes downwards and upwards.

3 Electrical performance

Resistance: 50mOhm Max.Current rating: 2.0A

4 Packaging Spec.Comformance to EIA 481

5 Reverse complaint.

Table 1 Mechanical performance		
working height	5.60mm	40±10gf <3.1>
Durability	20000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	0.1um Au over 1.4um Ni
2	Plunger	1	Leaded Brass	0.4um Au over 1.4um Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

DIST

Rev.	NEW	2011/06/13
Revision record.		
Date.		

Top-Link Electronics Ltd		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin	APVD:	<i>top-Link</i> <i>Electronics</i> Top-Link Electronics Ltd.	
0.0 = ± 0.15		CHK:		REL:		
0.00 = ± 0.10						
0.000 = ± 0.005						
Angle: ±1						
SURF. TEXTURE:						
REMOVE BURRS.						
BREAK SHARP EDGES						
R0.05 MAX.DO NOT						
SCALE PRINT.						

Name	POGO PIN	PG-0.8-10.4-1.5-5.3-7.1
Scale	Size	DWG No.
1:1	A4	C-101498
		Page 1/1
		Rev. A

Name	Scale	Size	DWG No.	Page	Rev.
POGO PIN PG-0.8-10.4-1.5-5.3-7.1	1:1	A4	C-101498	1/1	A

4

3

2

1