


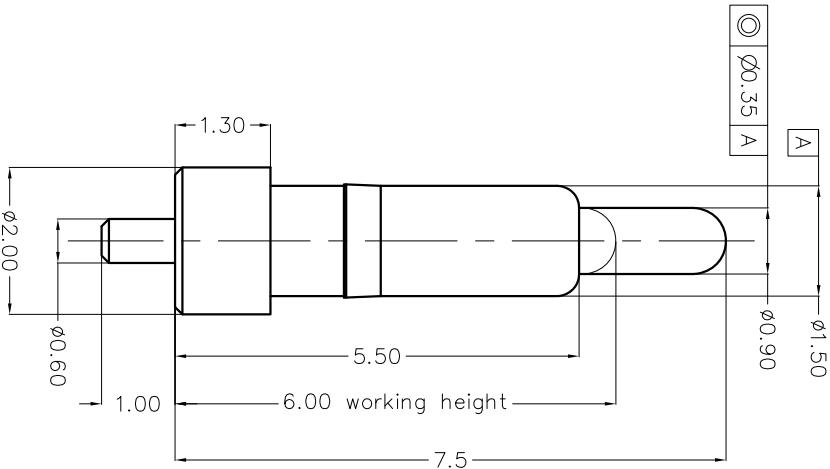

- Not
- 1 Demnissions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Total stroke : 1.9mm.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

Table 1 Mechanical performance		
working height	6.0mm	80±35gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd		Type	Customer drawing	Unit	mm	Weight	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong	APVD:		Top-Link Electronics Ltd	
0.0	± 0.15	CHK:		REL:			
0.00	± 0.10	Name POGO PIN					
0.000	± 0.05						
Angle: ±1°							
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.							
Scale	1:1	Size	A4	DWG No.	C-101540	Page	1/1
						Rev.	A