




DIST

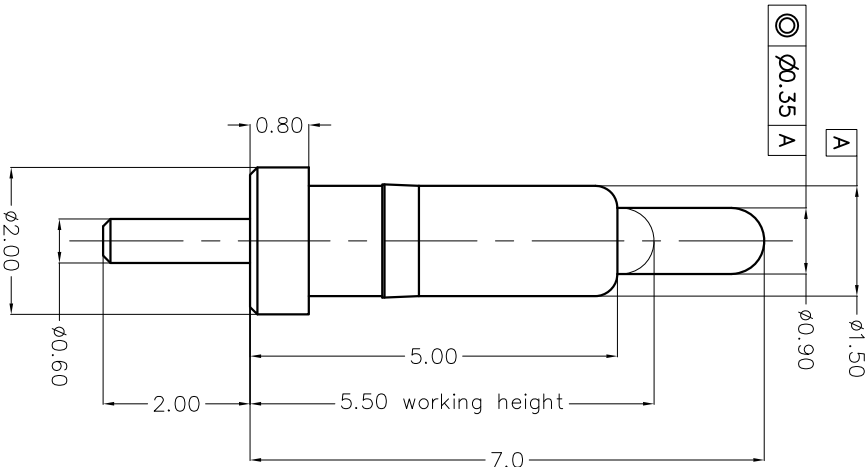

TOP LINK

Not
1 Demnnsions shall be interpreted per ASME Y14.5M.
2 Mechanical performance(See the table 1)
<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2> Total stroke : 1.9mm.
3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
4 Remo compliant.

Table 1 Mechanical performance		
working height	5.50mm	80±35gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leoded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

101568-1
PART NUMBER

Top-Link
Electronics Ltd.
TOLERANCES UNLESS
OTHER SPECIFIED
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
Angle: ±1°
SURF. TEXTURE:
REMOVE BURRS.
BREAK SHARP EDGES
R0.05 MAX.DO NOT
SCALE PRINT.

Type
Customer drawing
Unit
mm

Weight

DWN:
Qin zuozhong
CHK:

APVD:
REL:

Top-Link
Electronics
Top-Link
Electronics Ltd.

Name
POGO PIN

Scale
1:1
Size
A4
DWG No.
C-101568

Page
1/1
Rev.
1