


proposal

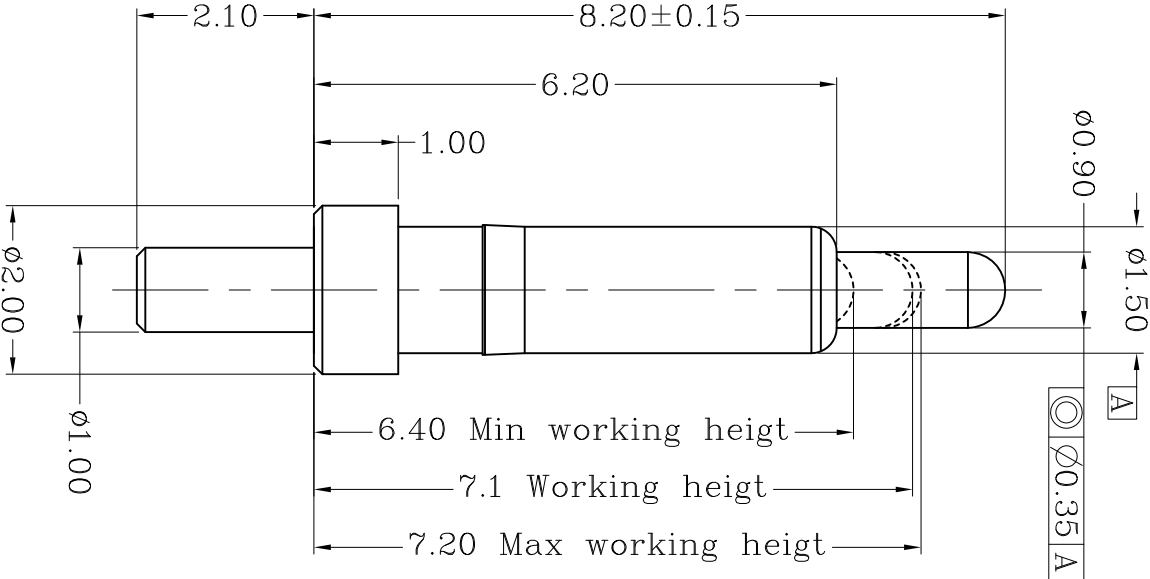

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

Item	Part name	Qty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
Working height	7.10mm	100±20gf <2.1>
Durability	10000cycle	

Top-Link Electronics Ltd.		Type	Unit	Weight		
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm			
0.0	± 0.15	DWN:			Topo-Link Electronics	
0.00	± 0.10	CHK:			Top-Link Electronics Ltd.	
0.000	± 0.05	REL:				
Angle: $\pm 1^\circ$		Name POGO PIN				
SURF. TEXTURE:						
REMOVE SHARP EDGES						
BREAK MAX. DO NOT SCALE PRINT.		Scale	Size	DWG No.	Page	Rev.
		1:1	A4	C-101593	1/1	A

Top-Link Electronics Ltd.

Top-Link Electronics Ltd.