



LDC
-
DIST
-

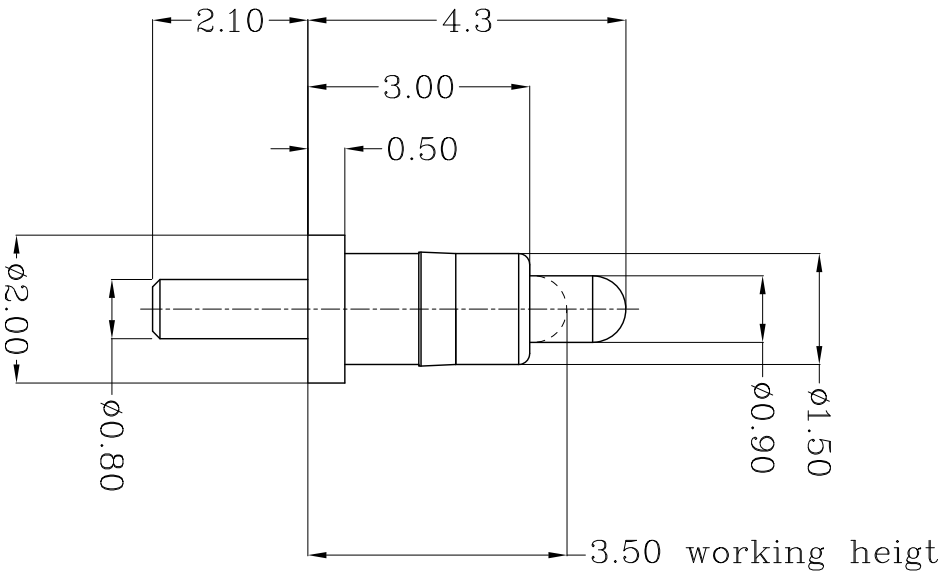

TOP-LINK

Notes:

- 1)Material:
1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
2)Spring : Stainless steel wire
- 2 Plating
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
1)Total stroke : 1.2mm
2)Durability: 10,000 cycle min.
- 4 Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

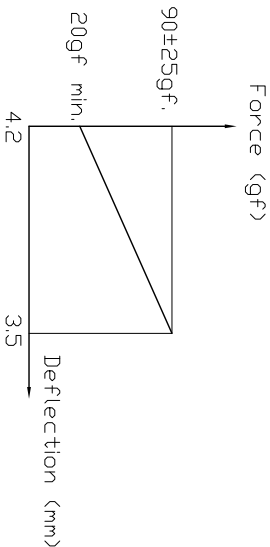

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN	APVD		
CHK	REL		
NAME	POGO PIN		
SCALE	1:1	A4	DWG NO. C-101620
SHEET	1 OF 1		
REV	1		

Top-Link
Electronics Ltd.

USED ON -