



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101642

proposal

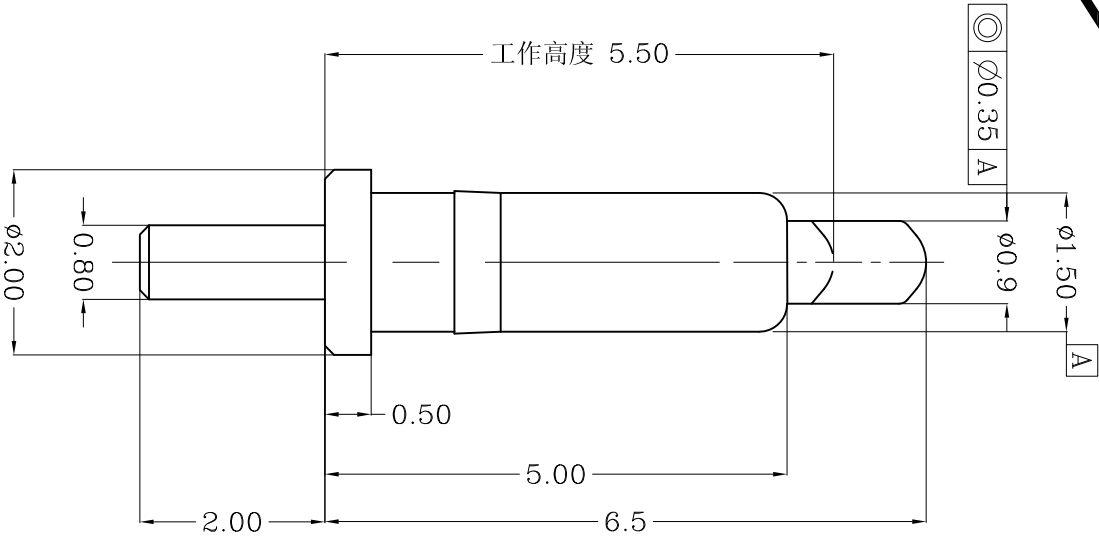

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
working height	5.50mm	90±25 gf
Durability	10000cycle	

TOP LINK

- Not
- 1 Demnnsions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> Side force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

Rev.	Revision record.	Date.
	NEW	2012/06/18

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm		Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong	APVD:	Top-Link Electronics Top-Link Electronics Ltd.		
0.0 = ±0.15		CHK:		REL:			
0.00 = ±0.10		Name POGO PIN					
0.000 = ±0.005							
Angle: ±1°							
SURF. TEXTURE: REMOVE BURRS.							
BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.							
Scale	Size	DWG No.	Page	Rev.			
1:1	A4	C-101642	1/1	B			