

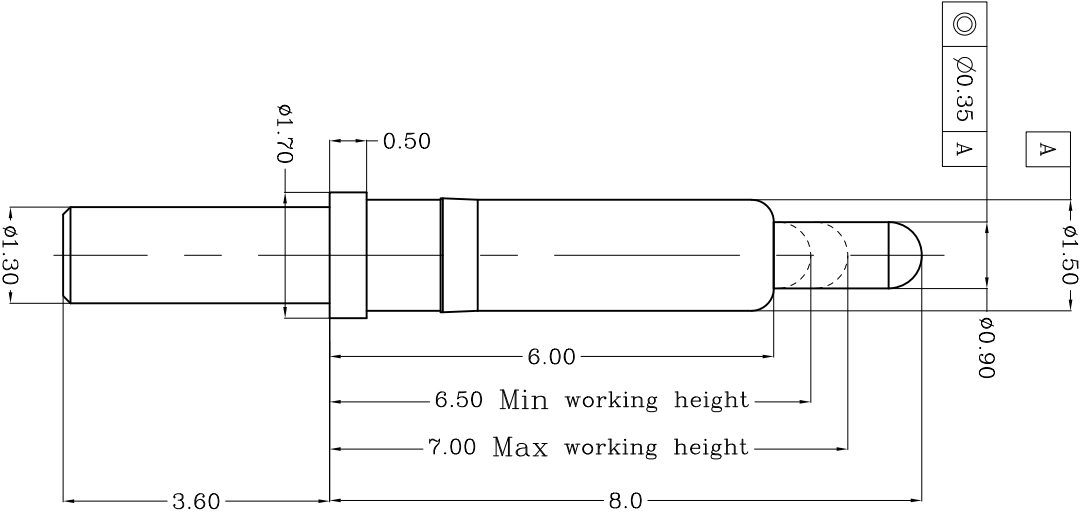


Table 1 Mechanical performance		
Max working height	7.00mm	80gf min <2.1>
Min working height	6.50mm	200gf Max
Durability	10000cycle	

- Not
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Warning: Working height are not permitted to be less than min working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

	Update	2012/10/09
	NEW	2012/09/26
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Cai wonlu	APVD:		
0.0 = ±0.15		CHK:	Top-Link Electronics Top-Link Electronics Ltd.			
0.00 = ±0.10						
0.000 = ±						
Angle: ±1°						
SURF. TEXTURE:		Name POGO PIN				
REMOVE BURRS.						
BREAK SHARP EDGES						
R0.05 MAX.DO NOT SCALE PRINT.						
Scale	1:1	Size	A4	DWG No.	C-101666	Page 1/1
				Rev.	B	