


proposal

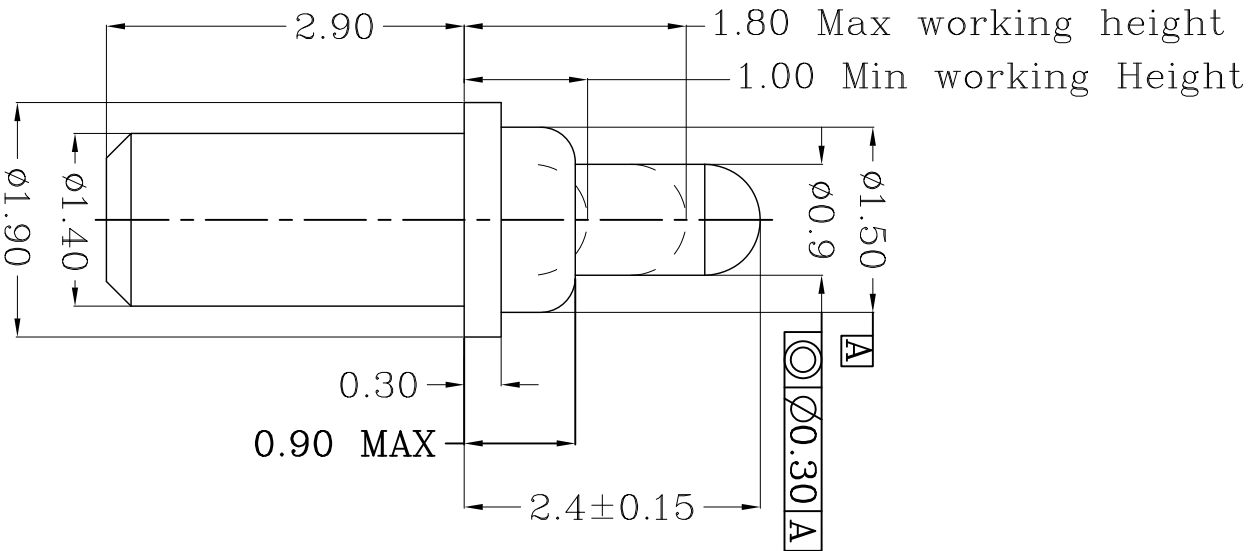

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 4 Electrical performance
- 5 Resistance:50mOhm Max.
- 6 Current rating: 2.0A
- 7 RoHS compliant.

Table 1 Mechanical performance

working height	1.20mm	80gf min<2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	JERRY	APVD:		
0.00 = ±0.15		CHK:		REL:		
0.00 = ±0.10		Name				
0.000 = ±0.005		POGO PIN				
SURF. TEXTURE:		Scale				
REMOVE BURRS:		1:1	Size	A4	DWG No.	C-101763
BREAK SHARP EDGES		Page				
R0.05 MAX DO NOT SCALE PRINT.		1/1				

PART NUMBER
101763-1

Top-Link Electronics Ltd.

Rev.	Revision record.	Date.
	Min working height:1.0mm	2013/07/11
	working height:1.2mm	
	NEW	2013/07/03