


proposal

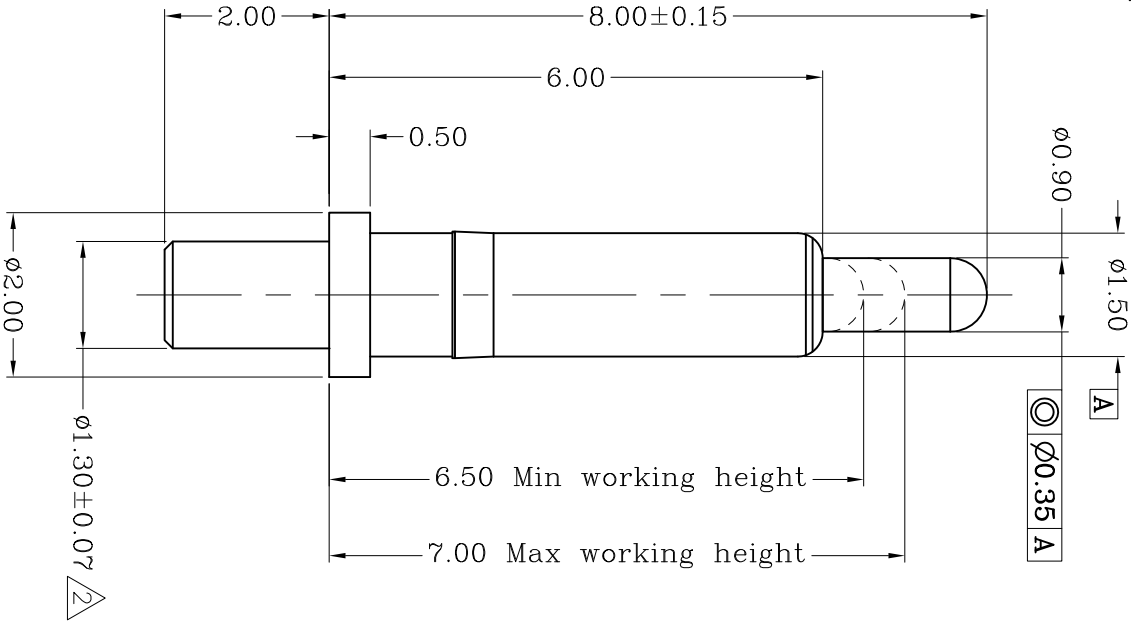

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 3.0A
- 4 RoHS compliant.

Table 1 Mechanical performance

Max working height	7.00mm	80gf min <2.1>
Min working height	6.50mm	200gf Max
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.4um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Type	Customer drawing	Unit	Weight
Top-Link Electronics Ltd.		mm	_____
TOLERANCES UNLESS OTHER SPECIFIED	DWN: Cai wonlu	APVD:	
0.0 = ±0.15	CHK:	REL:	
0.00 = ±0.10	Name	POGO PIN	
0.000 = ±0.05	Scale	Size	DWG No.
Angle: ±1°	1:1	A4	C-20101011283
SURF. TEXTURE: REMOVE BURRS.			
BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT.			

20101011283
PART NUMBER

Top-Link Electronics Ltd.

Top-Link Electronics Ltd.

2	Update	2015/11/16
1	NEW	2015/10/27
Rev.	Revision record.	Date.