





THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-110306

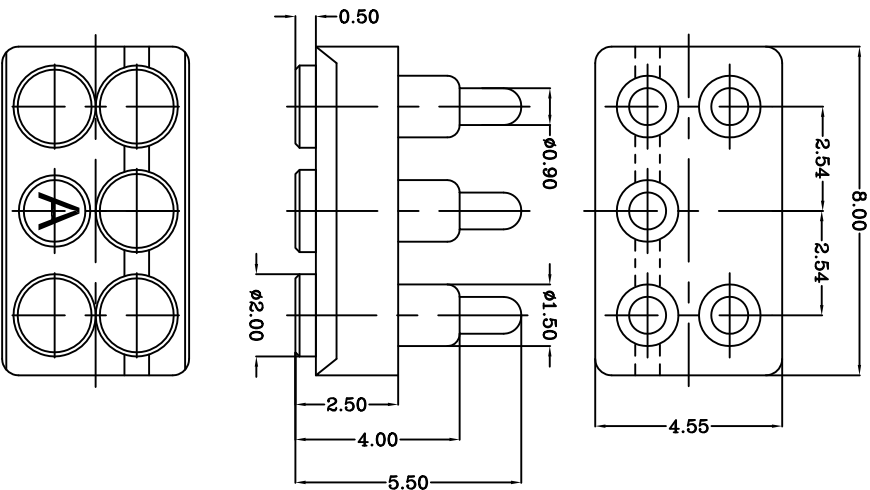

TOP-LINK

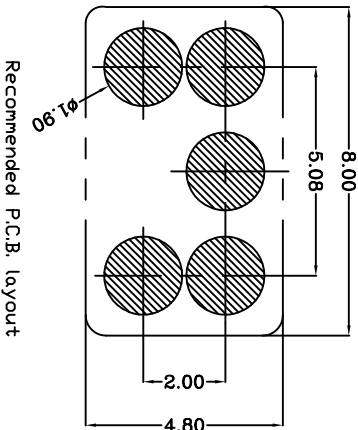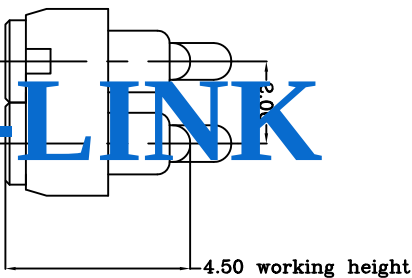

USED ON
-

- Notes:
- 1 Material, Housing: PA 4.6 (30% Glass Filled)
Contact: Brass
Color: Black.
 - 2 Mechanical demands:
Spring force: Min 0.3N with 0.5mm stroke
1.2 +0.20N/-0.20N with 1.0mm stroke.

Full stroke: 10mm
Plating position: Min 0.5um Au over 1.4um Ni
Plating barrel: Min 0.1um Au over 1.4um .

LDC
-
DIST
-

NEW		8006/03/27
REVISION	APVD	DATE
RECORD		
LTR		

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
DWN	APVD	REL
CHK	REL	REL
Jim		
NAME	BATTERY POGO CONNECTOR 2 POSITIONS	
SCALE	1:1	A4
DWG	NO.	C-110306
SHEET	1 OF 1	REV 1

110306-5
PART NUMBER

Top-Link
Electronics Ltd.