



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-100049




LDC
-
DIST
-

- Notes:
- △Material(材质):
Housing: LCP Color Black.
Contact: Brass
Spring :Stainless steel wire
- 2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镀底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镀底1.4um Min)
- 3 Mechanical:
Spring force: Min 0.2N with 0.3mm stroke
1.1 +0.30N/-0.20N with 1.0mm stroke.
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.

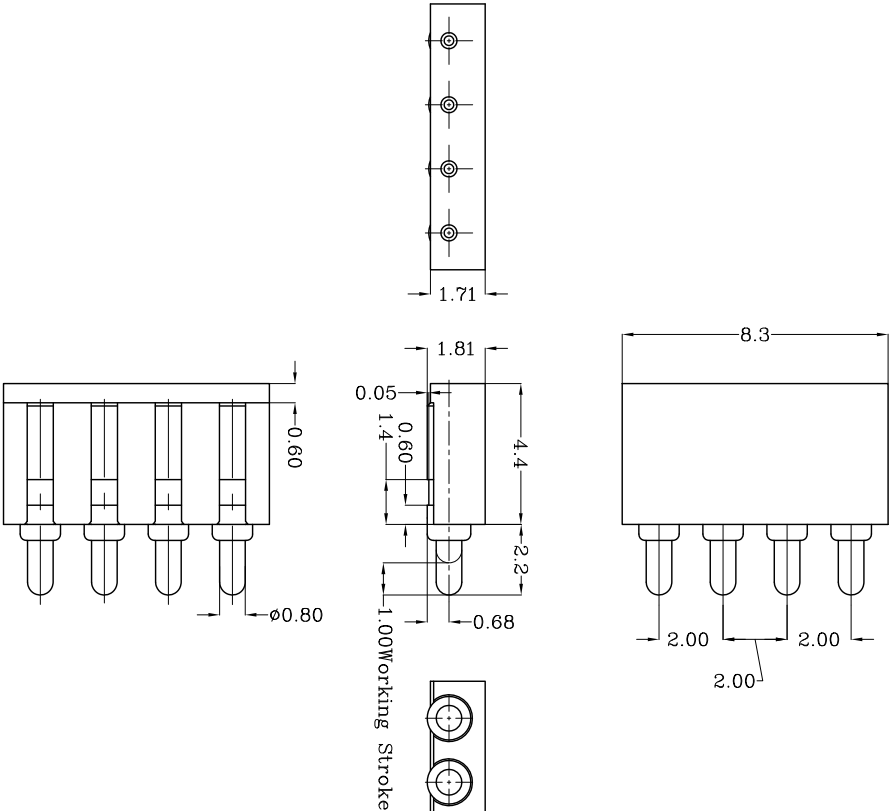

TOP-LINK

Application status 2
Recommended PCB Layout & Application

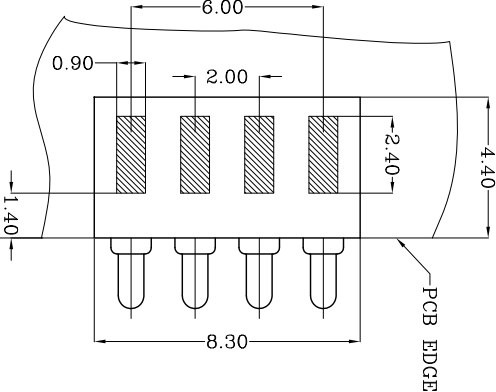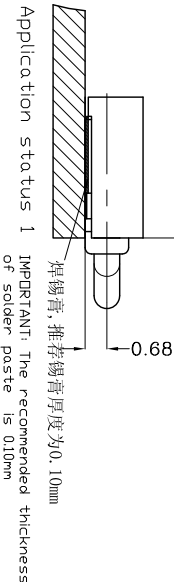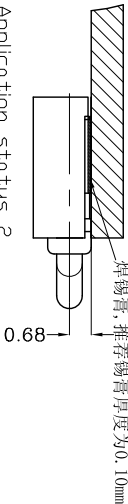

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				SURF TEXTURE: 32/ ANGLE: ±1°			
0	= ±-			REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT			
0.0	= ±0.10						
0.00	= ±-						
0.000	= ±						
MATERIAL				NAME			
DWN				BATTERY POGO CONNECTOR 4 POSITIONS RIGHT ANGLE			
CHK				PGC-1.36-6.6-RA-4P-2.0PH			
APVD				Top-Link Electronics Ltd.			
REL				Electronics			
SCALE				SHEET			
1:1				1 OF 1			
A4				REV			
DWG				E			
NO.							
C-100049							

100049-4
PART NUMBER

USED ON
-