


DIST

DIST

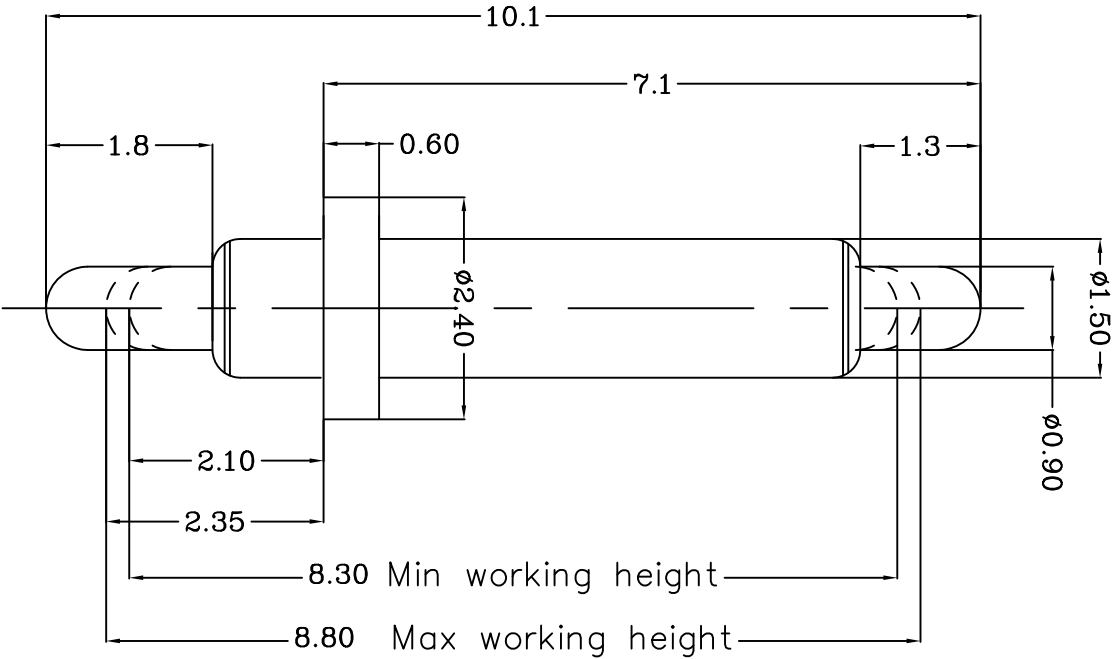

TOP-LINK

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
- Mechanical performance(See the table 1)
- The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- Electrical performance
- Resistance: 30mOhm Max.Current rating: 2.0A
- RoHS compliant.

Table 1 Mechanical performance

max working height	8.80mm	60 $\pm$ 20 fg
Min working height	8.30mm	80 $\pm$ 20 fg
Durability	10000cycle	

Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

B1	Update	2012/12/19
B	change spring	2008/04/21
A	NEW	2008/04/01
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Coi wanlu	APVD:		
0.0 = $\pm$ 0.15		CHK:		REL:		
0.00 = $\pm$ 0.10		Name				
0.000 = $\pm$ -		POGO PIN				
SURF. TEXTURE:		Scale				
REMOVE BURRS.		1:1				
BREAK SHARP EDGES		A4				
R0.05 MAX.DO NOT SCALE PRINT.		DWG No.				
		C-101164				
		Page				
		1/1				
		Rev.				
		B1				

101164-1
PART NUMBER