



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101238

LDC
-
DIST
-

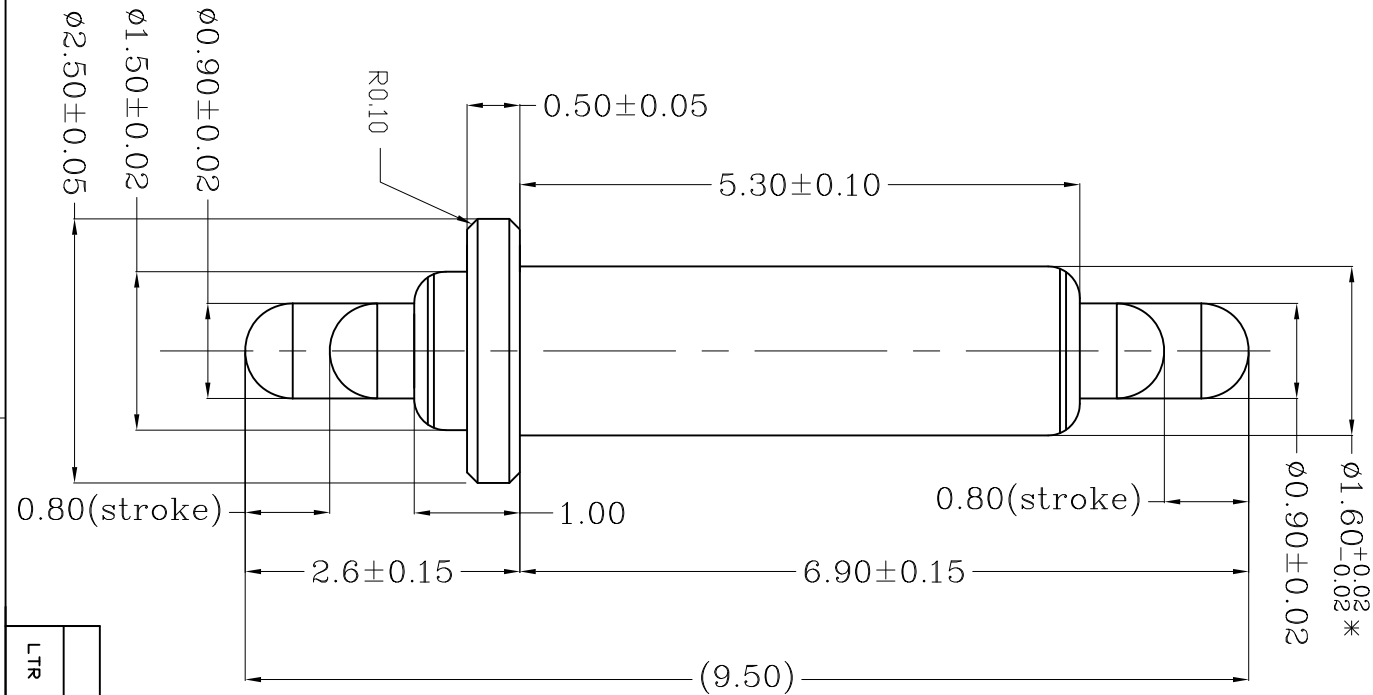

LTR	NEW	REVISION RECORD	APVD	DATE
				11/07/04

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN	APVD	Lansing	Top-Link Electronics Ltd.
CHK	REL		
JTM			
NAME	PGGD PIN		
SCALE	1:1	A4	DWG NO.
			C-101238
			PG-1.5-0.5-2.5-0.5-1.5-6.3-9.5-2P
			SHEET 1 OF 1
			REV A

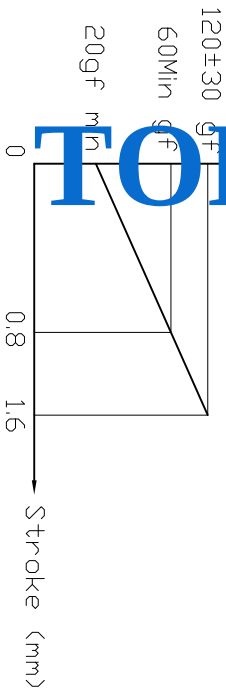

- Notes:
- 1) Material: Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
- 2) Spring : Stainless steel wire
- 3) Plating
- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
- 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
- 3) Mechanical
- 1) Total stroke : 1.2&1.2mm
- 2) Durability: 10,000 cycle min.
- 4) Electrical
- 1) Contact resistance: 50mOhm Max.
- 2) Operating voltage: 20VDC MAX.

USED ON

-