


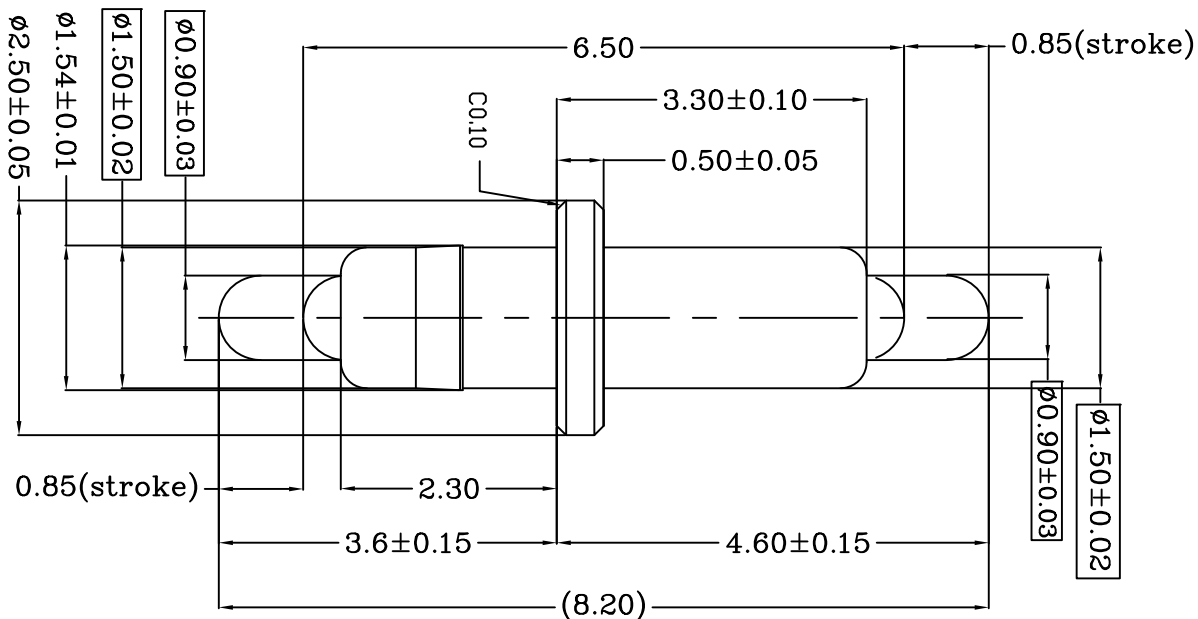

TOP-LINK

Notes:

1 Material(材质):

BODY & PLUNGER : Brass
Spring : Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Force(力):	Min 70gf per pin at 0.85mm stroke
Total stroke(总行程):	1.20&1.20mm
Durability(寿命):	10,000 cycle min.

4 Electrical(電性能)

Contact resistance(接触抵抗): 50mOhm Max
 Voltage rating(额定电压): 36V DC Max
 Current rating(额定电流): 2.0A

LDC	-
DIST	-

	力规格变更, 公差变更	10/09/30
	NEW	10/09/10
LTR	REVISION RECORD	APVD DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	HT TR		FIN	
0 = ± 0.0 = ±0.15 0.00 = ±0.10 0.000 = ± ANGLE: ±1°		△1		—		—
SURF TEXTURE: 32/ REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT		DWN HE CHK	APVD REL	<i>Top-Link</i> Electronics Top-Link Electronics Ltd.		
NAME		PGGD PIN				
SCALE		PG-1.5-2.8-3.8-1.5-2.8-4.6-2P				
1:1	A4	DWG NO.	C-101346		SHEET 1 OF 1	REV B

101346-1
PART NUMBER

USED ON