
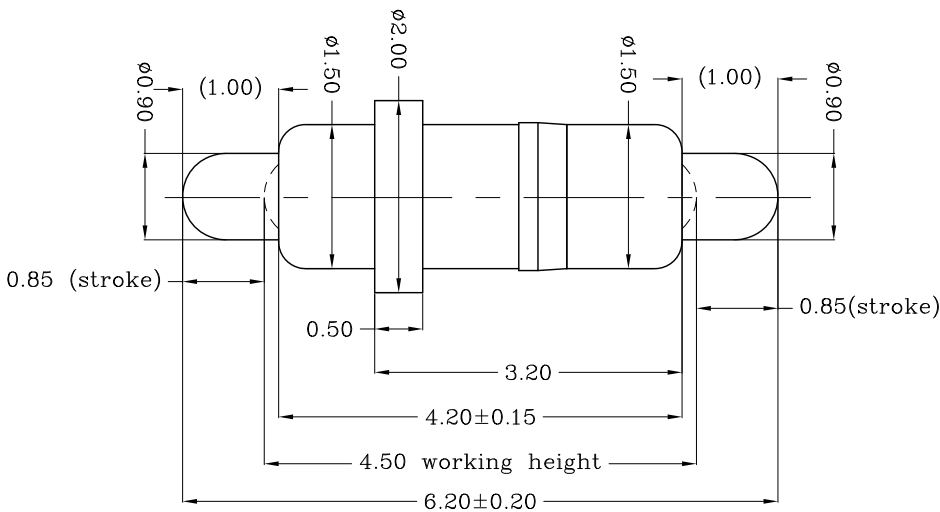




Notes:
1 Material (材质):

- 1) Body : Brass
- 2) Plunge : Brass
- 3) Spring : Stainless steel wire
- 2 Plating (电镀)
 - 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical (机械性能):
 - 1) Force: 700gf per pin at 1.7mm stroke (力: 下压1.7mm的力: 70±25gf)
 - 2) Total stroke (总行程) : 0.9&0.9 mm
 - 3) Durability (耐久性): 10,000 cycle min.
- 4 Electrical (电气性能):
 - 1) Contact resistance (接触阻抗): 30mOhm Max.
 - 2) Voltage rating (额定电压): 36V DC Max
 - 3) Current rating (额定电流): 2.0A

TOP LINK

USED ON
-

101468-1

PART NUMBER

DIMENSIONS IN MM		TOLERANCES UNLESS OTHER SPECIFIED	
0	= ± -	0.0	= ±0.15
0.0	= ±0.10	0.000	= ±
ANGLE: ±1°			

SURF TEXTURE: 32/		REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT			

NAME		PGGD PIN	
PG-1.5-1.0-2.0-0.5-1.5-4.2-6.2-2P			

SCALE		A4	
1:1			

DWG NO.		C-101468	

NEW		8011/01/10	
REVISION	APVD	DATE	
RECORD			

LDC	
-	
DIST	
-	

4

3

2

1