


DWG NO.
C-101483

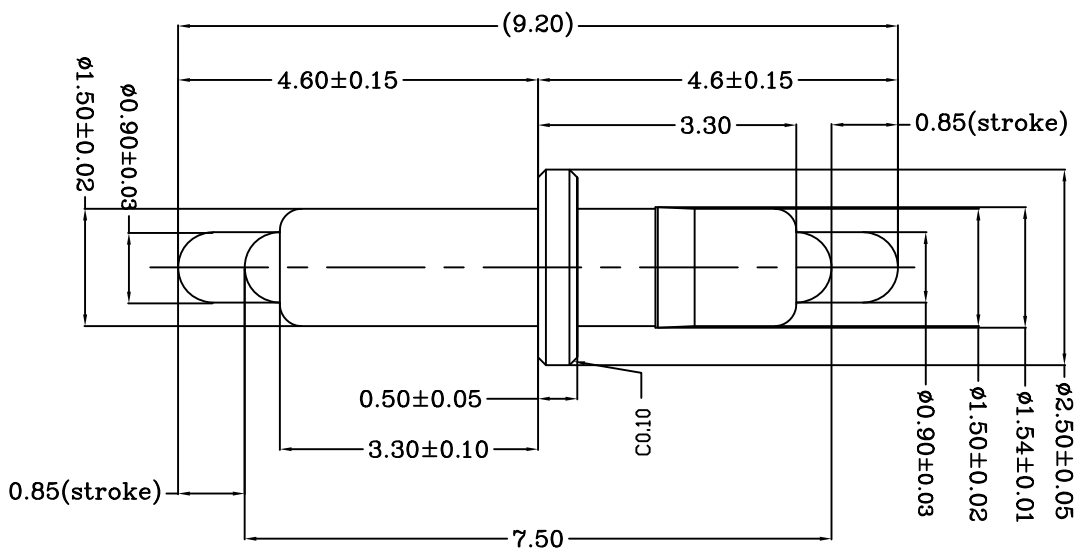

Notes:

1 Material(材質):
BODY & PLUNGER : Brass
Spring : Stainless steel wire

Plating:
 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
 (Body: 鍍金0.1um Min 鍍底1.4um Min)
 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
 (Plunger: 鍍金0.4um Min 鍍底1.4um Min)

3. Mechanical:
 Force(力): Min 70gf per pin at 0.85mm stroke
 Total stroke(总行程): 1.20&1.20mm
 Durability(寿命): 10,000 cycle min.

4 Electrical (电性能)
 Contact resistance(接触抵抗): 50mOhm Max
 Voltage rating(额定电压): 36V DC Max
 Current rating(额定电流): 2.0A

LDC	-
DIST	-

	NEW		11/03/03
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATERIAL		HT TR		FIN	
0 = ±		DWN		APVD		Top-Link Electronics	
0.0 = ±0.15		HE		REL		Top-Link Electronics Ltd.	
0.00 = ±0.10		CHK					
0.000 = ±							
ANGLE: ±1°							
SURF. TEXTURE: 32/		NAME		POGD PIN			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		SCALE		DWG NO.		SHEET 1 OF 1	
DO NOT SCALE PRINT		1:1		A4		REV 1	

101483-1
PART NUMBER